



Website: DoorFloodBarrier.com
General Inquiries: contact@legacyllc.com
Orders: orders@legacyllc.com
Main Office: 415 Concord Avenue Bronx, NY 10455
Phone: (718) 292-5333
Fax: (888) 383-3330


PROJECT

DATE

COMPANY




NOTES

Interlocking Flood Shield for Oversized Openings

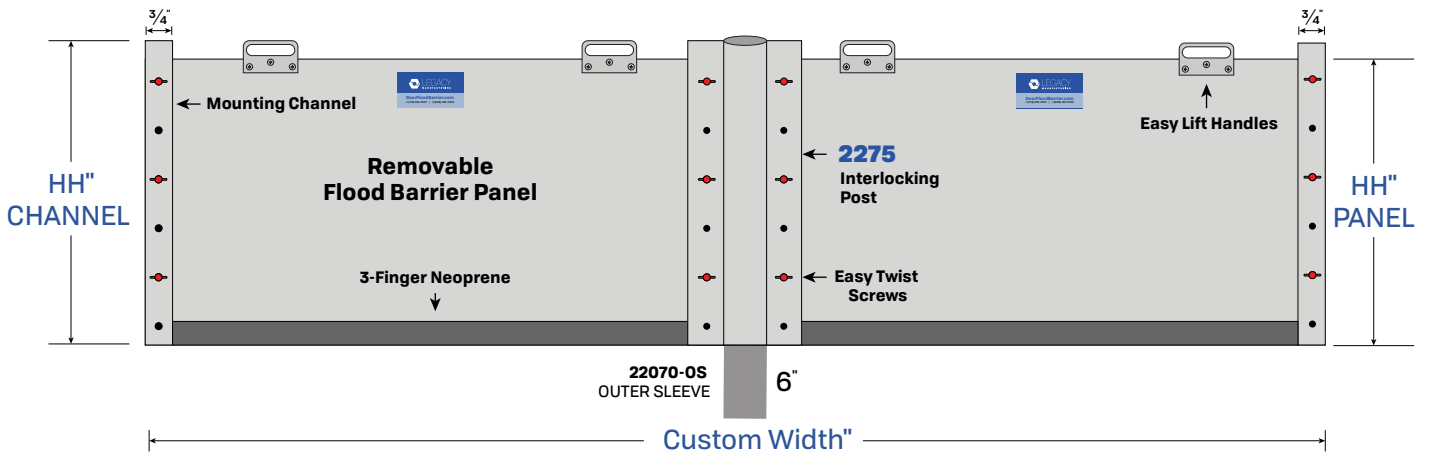

#5029 MOUNTED TO INSIDE OF FRAME

#5129 MOUNTED TO OUTSIDE OF FRAME

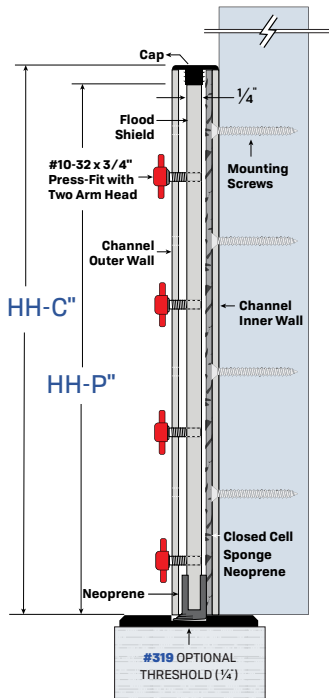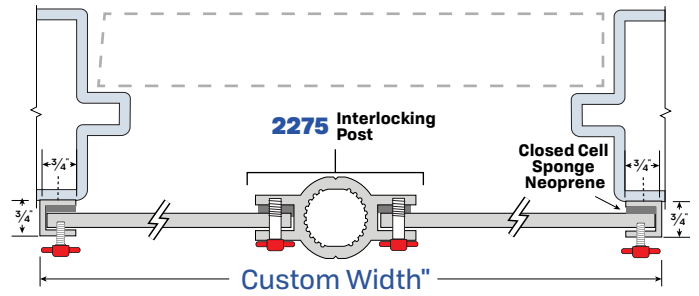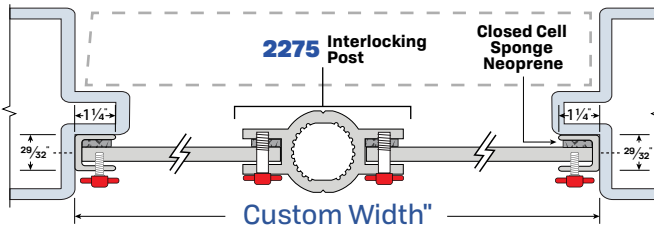

Product Specifications

Panel	5052 type Marine-grade Aluminum Alloy
Inside Mounted Channels	1 1/4" x 29/32" x 1/8" anodized aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening screws. Black anodized channels are also available if specified.
Outside Mounted Channels	3/4" x 3/4" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening screws.
Seals	Neoprene lines the bottom of the shield. Sponge Rubber lines the channels. Our seals are composed of high-density rubber extrusions for increased strength with a low hardness that provides superior compression.
Hardware	#10 x 1-1/4" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes.
Installation	Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.
Floor Surface	Optional flat 1/4" x 2" bevels on 2 sides of the aluminum plate - #319 Threshold