



Website: DoorFloodBarrier.com

General Inquiries: contact@legacyllc.com

Orders: orders@legacyllc.com



Main Office: 415 Concord Avenue Bronx, NY 10455

Phone: (718) 292-5333

Fax: (888) 383-3330

# Stackable Flood Shield

## #5021

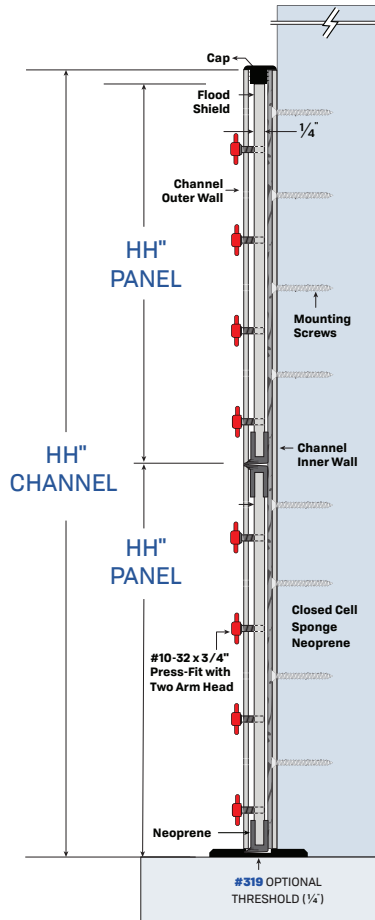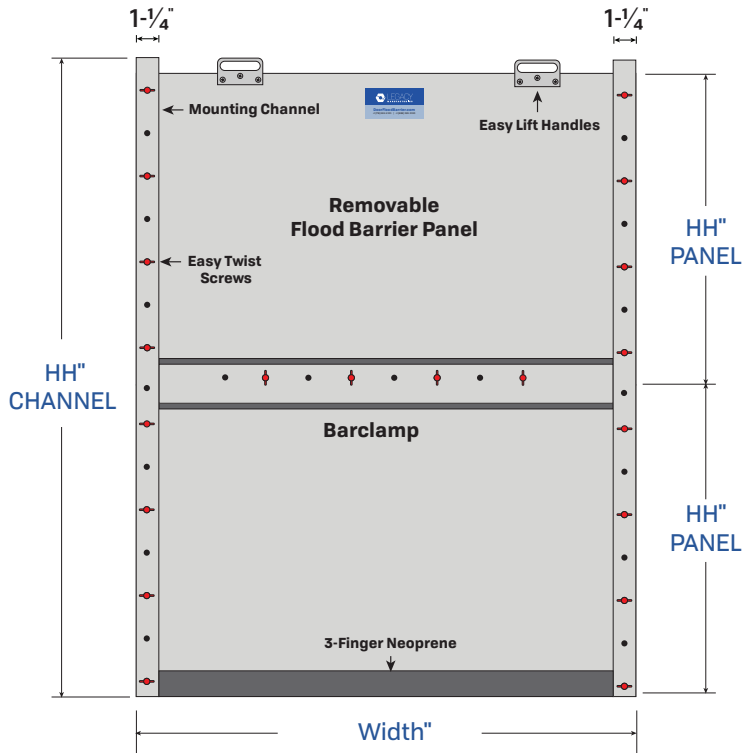

### Product Specifications

**PANEL:** 5052 type Marine-grade Aluminum Alloy

**INSIDE MOUNTED FRAMES:** 1-1/4" x 29/32" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening. Black anodized channels are also available if specified.

**OUTSIDE MOUNTED FRAMES:** 1-1/4" x 29/32" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening. Black anodized channels are also available if specified.

**FLOOR SURFACE:** Threshold aluminum Part #319. Optional

**SEALS:** Neoprene lines the bottom of the shield. Sponge Rubber lines the channels. Our seals are composed of high-density rubber extrusions for increased strength with a low hardness that provides superior compression.

**HARDWARE:** #10 x 1-1/4" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes.

**INSTALLATION:** Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.

Project :	Submitted By :
Date :	Notes :
Company Name :	