



Website: DoorFloodBarrier.com

General Inquiries: contact@legacyllc.com

Orders: orders@legacyllc.com


Main Office: 415 Concord Avenue Bronx, NY 10455

Phone: (718) 292-5333


Fax: (888) 383-3330

Single Flood Barrier for Standard Windows



#5028

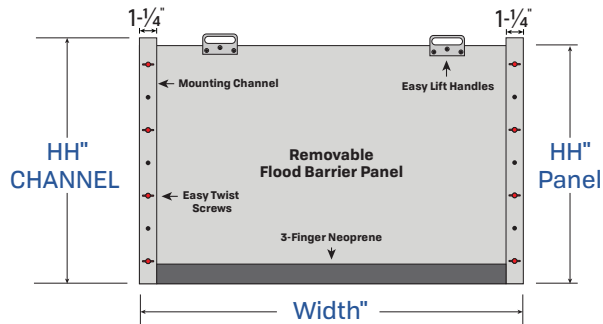

#5028 MOUNTED TO INSIDE OF FRAME

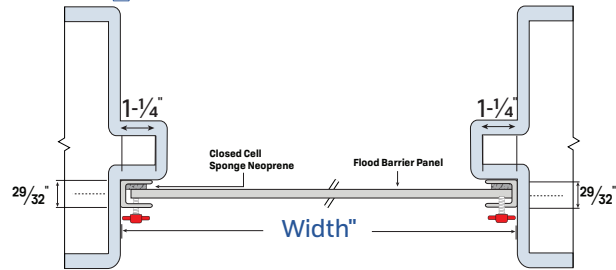

#5128 MOUNTED TO OUTSIDE OF FRAME

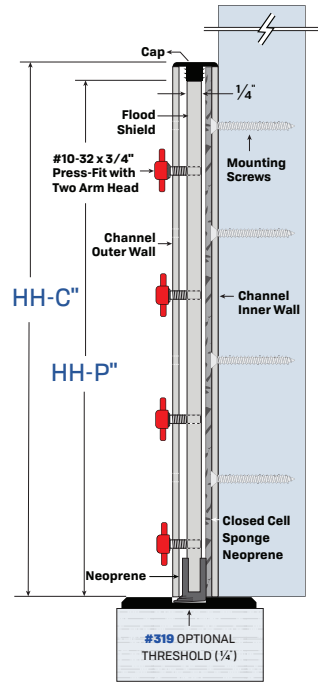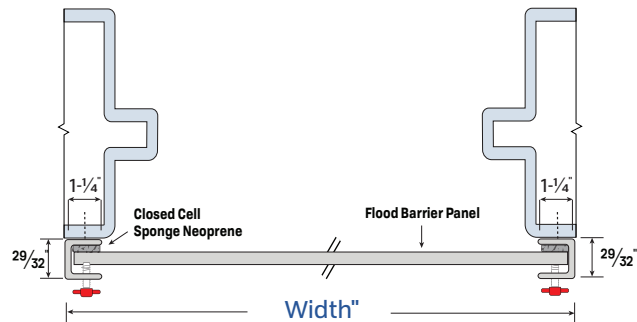

Product Specifications

PANEL: 5052 type Marine-grade Aluminum Alloy

INSIDE MOUNTED FRAMES: 1-1/4" x 29/32" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening. Black anodized channels are also available if specified.

OUTSIDE MOUNTED FRAMES: 1-1/4" x 29/32" x 1/8" aluminum extrusion 6062 alloy T5-T6, with 10-32 stainless steel allen head tightening. Black anodized channels are also available if specified.

FLOOR SURFACE: Threshold aluminum Part #319. Optional

SEALS: Neoprene lines the bottom of the shield. Sponge Rubber lines the channels. Our seals are composed of high-density rubber extrusions for increased strength with a low hardness that provides superior compression.

HARDWARE: #10 x 1-1/4" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes.

INSTALLATION: Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.

| | |
|----------------|----------------|
| Project : | Submitted By : |
| Date : | Notes : |
| Company Name : | |