

Our Legacy is Quality & Performance. Our Focus is Customer Service

Sealing Systems for Architectural Openings

Automatic Door Bottoms • Gasketing • Thresholds • Door Flood Systems INTUMESCENT MATERIAL - ACOUSTICAL SOUNDPROOFING INSULATION - RUBBER EXTRUSIONS - WEATHERSTRIPPING



















Legacy Manufacturing is a young, resourceful the industry depending on those requirements, company solidly rooted in almost 100 years specification to shipment can take as little as of experience, innovation and advanced two days. technology dedicated to providing superior sealing systems for architectural openings. Our capabilities and commitment also provide Our engineered parts and systems offer unique value to our OEM partners. Legacy proven solutions to the wide range of security and life safety challenges the proprietary OEM programs for integrated product building team faces to ensure reliable design and independent laboratory testing. performance in those openings. And we offer In addition to configuring sealing systems, an unequaled range of product features and including intumescent and high-performance options for maximum specification flexibility.

On-site manufacturing and proprietary processes enable us to provide best-inindustry turnaround on parts orders. Handson manufacturing control also allows us to ensure consistent, unsurpassed quality in our at our plant in Ohio, making Legacy the only U.S.

Custom orders are our special strength. We are uniquely equipped to respond promptly to specific architect or owner requirements and provide documented design solutions for your approval. Our turnaround on customized Legacy solutions is setting new standards for

engineers can assist you in developing acoustical applications, we are able to manufacture rubber formulations to customer specifications, or developed collaboratively.

Legacy's comprehensive offering of parts and integrated systems shown in this catalog reflects a long tradition of expertise and products. We produce all rubber for our products responsiveness in problem-solving for the door and hardware industry. Above all, we place source in our industry for the high-quality rubber a premium on providing the expert support extrusions so critical to door sealing performance you expect and need. From answering basic product and installation questions to the most complex customization requirements, our friendly, highly-trained customer service team is standing by and ready to help.


LEGACY'S Product Code

The first number of each product code identifies where the product is installed in the opening. Other components of our product codes are explained in the How To Order sections of this catalog.





Products mounted to the door and frame, such as hinges and finger protection. Products that do not have a specific mounting location, such as acoustical sheets. Products mounted to the floor such as thresholds and saddles. Sub-components or sub-assemblies, such as replacement rubber parts. Products attached to a frame, such as perimeter gasketing.






TABLE OF CONTENTS

Automatic Door Bottoms	4 - 16
How to Order	
Heavy Duty	6 - 9
Light Duty	10
Hollow Metal Doors	1
Heavy Duty Extended Drop	12 - 13
Corner Dust Plug	13
Air Flow	14
Lead Lined for X-Ray Protection	15
End Caps	10

Door Sweeps	17 - 26
How To Order	17
Surface-Mounted	18-20
Adjustable	19
Oversized	21
Rain Drip	22
Air Flow	23
Mortised	23-25
Stainless Steel	26

Thresholds	27 - 4
How To Order	2
Accessories	2
Options	2
Adjustable Thresholds	29-3
Aluminum Thresholds (1/4")	3
Aluminum Thresholds (1/2")	32, 3
Half-Saddles	3
Carpet Saddles	3
Stop Strips	3
Rabbeted Thresholds	3
Ramps	3
Thermal Breaks	3
Interlocking Aluminum	39,4

Interlocking Bronze	39, 4
IN- Swinging Door Saddles	4
Architectural Bronze	42-4
Expansion Joint Plates	4
Diamond Plates	4
Stainless Steel	4

Self-Adhesive Gasketing	46 - 49
How To Order	46
Silicone with PSA	47
Kerf Gasketing	48
Sponge Rubber	49
Pile Brush	49

Perimeter Seals	50 - 58
How To Order	50
Strike Plate Mounting Brackets	51
Adjustable	52-54
Stainless Steel	53
Mechanically Fastened	55-58

Meeting Stiles / Astragals	59 - 66
How to Order	59
Both Doors Active	60-62
Mortised	63
Overlapping Astragals	64,65
Glass Door Solutions	66
Glass Door Gasketing	66

Specialty Hinges	67 - 70
How To Order	67
Continuous Hinges	68
Acoustical Cam Lift Hinges	69
Finger Guard Protection	70

Accurate Weatherstripping	71 - 73
How To Order	71
nterlocking Metal Weatherstrips	72 - 73
Hinge Door Springs	73


Flood Barriers	74 - 79
About Flood Barriers	74
How To Order	75
Standard Openings	76-77
Doors	76
Windows, Louvers & Fireplaces	77
Oversized Openings	78
Individual Components	79
Stackable Doors	79

Specialized Systems	80 - 90
& Applications	
Acoustical Systems	80-82
Miscellaneous Systems	83
Automatic Door Bottom on	84
Stand-By	
Nitrile	85
EMI/RFI Systems	85
Sliding Door System	86
Ligature Resistant System	87
Acoustical Soundproofing Insu-	88
lation	
Fire Protection Material	89
Legacy Rubber	90

Technical Data	91 - 95
Materials	91
Finishes	92
Symbols & Standards	93
Options	94-95
Parts Index	96-97

Fully Integrated Sealing Solutions

Legacy provides both integrated systems and individual components for door openings, such as these representative assemblies.

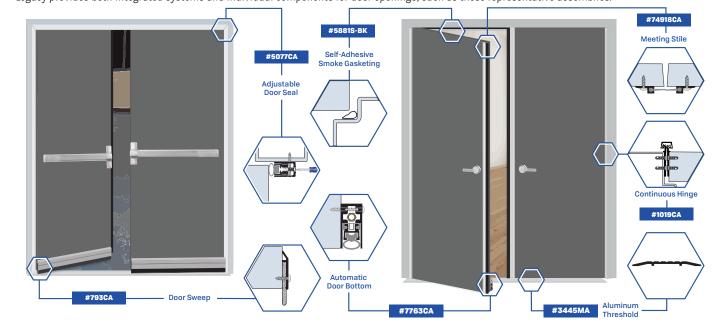

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

#7763CA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM





Automatic Door Bottoms (ADB)

Legacy automatic door bottoms (ADB) are designed and built using proprietary rubber and highest-quality housings for superior performance and durability, even under the most challenging installed conditions. The proof is in our exhaustive cycle testing in the lab. And the best measure of performance over many years in the field is the sound of silence from satisfied customers.


Legacy's ADB product line is unsurpassed in the industry for scope and versatility. Used primarily for blocking air, noise, smoke and fire, Legacy ADBs are also available for specialized applications, such as electrical actuation, X-ray protection or allowing free air flow. Additional options help specifiers optimize the utility of our models for specific applications, and we offer a wide range of anodized and powder-coated finishes. Recent enhancements provide simplified interior design for better service life and maintenance.

Patent-pending technology

The technology for reliable performance is the same for all standard Legacy ADBs. The rubber seal along the bottom of the unit is concealed when the door is open.


As the door closes, compression of a plunger against the door frame activates a spring mechanism that controls the drop of the seal. Operating from the hinge side to eliminate drag and resistance, the gasket drops down smoothly in a scissor-like motion creating an uninterrupted seal along the floor.

This self-leveling operation ensures a tight seal even on uneven surfaces. An adjustable brass hex nut attached to the plunger provides additional control to satisfy field conditions.

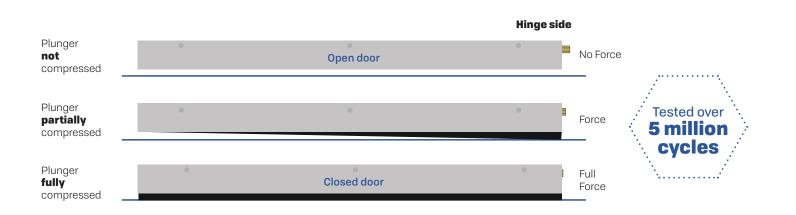

Mounting Options







Brass hex nut installed on hinge side (only) can be used to adjust pressure on internal spring.

How To Order: **Automatic Door Bottoms**

Example #7463CA-FX-36

Easy Ways To Order

Email Orders@LegacyLLC.com

Phone Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

PART NUMBER & FINISH **OPTIONS - LENGTH (IN)**

7463

> Finishes vary by product. Please check available finishes listed for each product.

CA - Clear Anodized

MA - Mill Aluminum

BK - Black Anodized Aluminum

DB - Dark Bronze Anodized Aluminum

GD - Gold Anodized Aluminum

WP - White Powder Coat

Options vary by product. Please check available options listed for each product.

FL - Fire Label

FX - Intumescent

LS - Light Spring

Blank - No Option AIR - Air Flow

LENGTH

PRODUCT CATALOG #24

LIG - Ligature Resistant EA - Electrical Actuator LL - Lead Lined

EMI/RFI - Electromagnetic / Radio Frequency Interference EP - Extended Plunger

PULL - Pull Out Out PV - Pivot Doors

SF - Security Fasteners

SL - Sliding Doors

TD - Top Door Installation

AVAILABLE SIZES - Can be manufactured to any length from 12" to 144". Please specify to nearest 1/16"











AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

3LS - Light Spring

Adjusting the brass nut changes pressure on concealed internal spring to

• Unit supplied with 1 pair of end caps - Part #4063EC-CA or #4063EC-MB

434APKL

364AA

PULL - Pull Out

PV - Pivot Doors

SF - Security Fasteners

TD - Top Door Installation

SL - Sliding Doors

PV - Pivot Doors

SL - Sliding Doors

SF - Security Fasteners


#7063 (A) (II)

#**7163** (**a**) (**b**)

#**7263** (4) (11)

#8 x 1-1/2"

← .916" (23.3)



.916" (23.3) →

1.901

Mortised

FINISHES: CA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

EA - Electrical Actuato
FL - Fire Label
3 LS - Light Spring

tor **PULL** - Pull Out PV - Pivot Doors

TD - Top Door Installation

 Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.

SF - Security Fasteners

- Self-leveling door seal up to maximum 1" drop.
- Replacement closed cell sponge neoprene Part #4363SPR
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB

LEGACY	NGP	РЕМКО	ZERO
7063	423N	434ARL	360AA



Surface-Mounted

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

EA - Electrical Actuator **PV** - Pivot Doors

SL - Sliding Doors

6 LS - Light Spring

- Adjusting the brass nut changes pressure on concealed internal spring
- Self-leveling door seal up to maximum 1" drop.
- Replacement closed cell sponge neoprene Part #4363SPR

LEGACY	NGP	PEMKO	ZERO
7163	420N	430ARL	361AA



Semi-Mortised

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

SL - Sliding Doors TD - Top Door Installation

6 LS - Light Spring

FL - Fire Label

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1" drop.
- Replacement closed cell sponge neoprene Part #4363SPR
- Unit supplied with 1 pair of end caps Part #4163EC-CA or #4163EC-MB

)
7263 420	NHM 430	ARL 362A	A



FL - Fire Label

SF - Security Fasteners

- to satisfy field conditions.

•	Unit supplied wi	th I pair of end	d caps - Part #416	33EC-CA or	#4163EC-MB

#7163CA	

Surface-Mounted

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

FL - Fire Label

Mortised

FINISHES: CA

FL - Fire Label

LEGACY

7463

FX - Intumescent

EA - Electrical Actuator

satisfy field conditions

• Self-leveling door seal up to maximum 1" drop.

522N

Replacement closed cell sponge neoprene - Part #4563N

EA - Electrical Actuator EMI/RFI Electromagnetic/Radio

FX - Intumescent **3 LS** - Light Spring

Frequency Interference PULL - Pull Out

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1" drop.
- Replacement neoprene Part #4563N
- Unit supplied with 1 pair of end caps Part #4163EC-CA or #4163EC-MB

LEGACY	NGP	PEMKO	ZERO
7563	520N	4301APKL	365AA

Semi-Mortised

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

EA - Electrical Actuator

Electromagnetic/Radio Frequency Interference PULL - Pull Out

3 LS - Light Spring

SL - Sliding Doors

TD - Top Door Installation

- satisfy field conditions.
- Unit supplied with 1 pair of end caps Part #4163EC-CA or #4163EC-MB

LEGACY	NGP	PEMKU	ZERU
7663	520NHM	4301APKL	366AA



MADE IN USA

#7563CA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

SL - Sliding Doors

EA - Electrical Actuator **PULL** - Pull Out

PV - Pivot Doors SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
7263	420NHM	430ARL	362AA

#**7463** (4) (11)

1.575"

(40.0)

1" Max. Drop


.125


(3.2)




J.371["]

#**7563** (4) (1) (12)





#**7663** (4) (11)





FL - Fire Label PV - Pivot Doors FX - Intumescent SF - Security Fasteners



Adjusting the brass nut changes pressure on concealed internal spring to

• Self-leveling door seal up to maximum 1" drop. • Replacement neoprene - Part #4563N

#**7963** (4) (11) **← .924**" (23.5) → 1.575" (40.0).125" (3.2).250"(6.4) .371 7/8" Max. Drop (9.4)

Mortised

FINISHES: CA


AVAILABLE SIZES: Can be manufactured to any length from 12" to 96" **OPTIONS:**

EA - Electrical Actuator **FX** - Intumescent **PV** - Pivot Doors FL - Fire Label

- · Adjusting the brass nut changes pressure on concealed internal spring to
- Self-leveling door seal up to maximum 7/8" drop.
- Replacement neoprene Part #4563N and Jacket Part #4763N



#7763 (4) (9)



← .916" (23.3) −

Surface-Mounted

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 96"

OPTIONS:

EA - Electrical Actuator FX - Intumescent FL - Fire Label

PV - Pivot Doors **PULL** - Pull Out SF - Security Fasteners

NOTES:

- · Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 7/8" drop.
- Replacement neoprene Part #4563N and Jacket Part #4763N
- Unit supplied with 1 pair of end caps Part #4163EC-CA or #4163EC-MB

LEGACY	NGP	PEMKO	ZERO
7763	-	-	367AA

#7763CA

#**7863** (4) (11) Semi-Mortised

1.901

FINISHES: CA, BK, DB, GD, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 96"

OPTIONS:

EA - Electrical Actuator FX - Intumescent

FL - Fire Label

PULL - Pull Out **SF** - Security Fasteners **PV** - Pivot Doors


NOTES:

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Replacement neoprene Part #4563N and Jacket Part #4763N
- Unit supplied with 1 pair of end caps Part #4163EC-CA or #4163EC-MB

LEGACY	NGP	РЕМКО	ZERO
7863	-	-	368AA



#**7053 (4) (3)**



Mortised

FINISHES: CA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

AIR - Air Flow **3**LS - Light Spring **EA** - Electrical Actuator **PULL** - Pull Out LL - Lead Lined

SF - Security Fasteners **SL** - Sliding Doors

PV - Pivot Doors

SL - Sliding Doors

SF - Security Fasteners

TD - Top Door Installation PV - Pivot Doors

NOTES:

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- · Self-leveling door seal up to maximum 1" drop.
- Replacement neoprene Part #4053N or optional Part #4441N
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB

LEGACY	NGP	РЕМКО	ZERO
7053	225N	434APKL	350AA





-11/_{16 (18.3)}-

FINISHES: CA, BK, WP

Surface-Mounted

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"


OPTIONS:

AIR - Air Flow **LL** - Lead Lined **3LS** - Light Spring EA - Electrical Actuator FL - Fire Label **PULL** - Pull Out

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions
- · Self-leveling door seal up to maximum 1" drop.
- Replacement neoprene Part #4053N or optional Part #4441N
- Unit supplied with 1 pair of end caps Part #4153EC-CA or #4153EC-MB

LEGACY	NGP	PEMKO	ZERO
7153	222N	4131ASL	351AA

#7253 (4) (9)



Semi-Mortised

FINISHES: CA, BK, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

AIR - Air Flow FL - Fire Label LL - Lead Lined

3LS - Light Spring

SF - Security Fasteners EA - Electrical Actuator **PULL** - Pull Out PV - Pivot Doors

SL - Sliding Doors **TD** - Top Door Installation



#7153CA



- Replacement neoprene Part #4053N or optional Part #4441N
- Unit supplied with 1 pair of end caps Part #4153EC-CA or #4153EC-MB

LEGACY	NGP	PEMKO	ZERO
7253	222N	4131ASL	352AA

1/4"(6.4)

#8 x 1-½" SMS

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM


PULL - Pull Out SF - Security Fasteners

- satisfy field conditions.
- Unit cumplied with 1 pair of end cane Dart #4063EC-CA or #4063EC-MB

•	Offic Supplied	with i pair	oi enu caps	- Part #4003EC	CA UI	#4003EU-IV	ID

LEGACY	NGP	РЕМКО	ZERO
7963	-	-	369AA

#**7153** (4) (11)



• Self-leveling door seal up to maximum 7/8" drop.

#7863CA

Adjusting the brass nut changes pressure on concealed internal spring to

satisfy field conditions. · Self-leveling door seal up to maximum 1" drop.

.595 1.458" (37.0)5/8" Max. Drop **.063**" (1.8)

(9.5)

Mortised

FINISHES: CA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

AIR - Air Flow	3LS - Light Spring
FL - Fire Label	PULL - Pull Out
EA - Electrical Actuator	PV - Pivot Doors

- SF Security Fasteners SL - Sliding Doors
 - TD Top Door Installation


- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- · Self-leveling door seal up to maximum 5/8" drop.
- Replacement neoprene Part #4023N
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB

LEGACY	NGP	РЕМКО	ZERO
7023	335N	411ARL	320AA





#7553 (4) (9)



Mortised

FINISHES: MA


AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

AIR - Air Flow
EA - Electrical Actua
FL - Fire Label

LIG - Ligature Resistant **SF** - Security Fasteners **3 LS** - Light Spring PV - Pivot Doors

SL - Sliding Doors



NOTES:


- For use on 1-3/4" and larger Hollow Metal doors
- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1/2" drop.
- Replacement neoprene Part #4075N
- No end caps provided

LEGACY	NGP	РЕМКО	ZERO
7553	320N	420APK	355A



#7323 (a)

#7123 (4)



-19/₃₂" (15.1)→

Mortised

FINISHES: CA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

AIR - Air Flow EA - Electrical Actuator FL - Fire Label

3 LS - Light Spring **PULL** - Pull Out PV - Pivot Doors

- SF Security Fasteners
- SL Sliding Doors
- TD Top Door Installation

#7323CA

NOTES:

- For doors smaller than 1-3/4"
- · Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 5/8" drop.
- · Unit is handed and can be reversed upon request.
- Replacement neoprene Part #4023N
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

3 LS - Light Spring


· Adjusting the brass nut changes pressure on concealed internal spring to

PULL - Pull Out

PV - Pivot Doors

LEGACY	NGP	РЕМКО	ZERO
7323	-	-	323AA

#**71553** (**4**) (**1**)



Mortised

FINISHES: MA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

Adjusting the brass nut changes pressure on concealed internal spring to

3551A

OPTIONS:

EA - Electrical Actuator **PV** - Pivot Doors FL - Fire Label **3 LS** - Light Spring

satisfy field conditions.


· No end caps provided

• For use on 13/4" and larger Hollow Metal doors

• Self-leveling door seal up to maximum 1/2" drop.

Replacement neoprene - Part #434N

SL - Sliding Doors SF - Security Fasteners TD - Top Door Installation



#71553CA

Surface-Mounted

FINISHES: CA, BK, WP

EA - Electrical Actuator

satisfy field conditions.

· No end caps provided

LEGACY 7123

OPTIONS:


AIR - Air Flow


FL - Fire Label

NOTES:

LEGACY	NGP	PEMKO	ZERO
7323	-	-	323AA

#72553





Mortised

LEGACY 71553

FINISHES: MA

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

OPTIONS:

AIR - Air Flow
EA - Electrical Actuato
3LS - Light Spring

LIG - Ligature Resistant SL - Sliding Doors PV - Pivot Doors SF - Security Fasteners

TD - Top Door Installation



- For use on 1-3/4" and larger Hollow Metal doors
- · Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1/2" drop.
- Replacement Nylon Brush Part #4075NB
- No end caps provided

LEGACY	NGP	РЕМКО	ZERO
72553	-	-	3552 <i>A</i>





PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

220N

Replacement neoprene - Part #4023N

• Self-leveling door seal up to maximum 5/8" drop.

· Unit is handed and can be reversed upon request.

412ARL

321AA

SF - Security Fasteners

SL - Sliding Doors

MADE IN USA

#7123CA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

Extended Drop Door Bottoms for Use On Doors With Excessive Gaps (Patent Pending)

Developed in response to specific user requirements, our new extended drop automatic door bottom solves two common problems. Its integrated design features a unique sloped top casing designed to slough off rain water and prevent pooling on top of the ADB housing in exterior applications. It simplifies installation by eliminating the need for adding a separate rain drip part to the door bottom.

Providing up to a 1.5 inch drop, deeper than typical ADBs, this unit is also designed to help compensate for drop differentials found in door installations with large gradients or slope conditions on one side of the door. The deep drop can also be useful for exterior installations where floor surfaces may be degraded by weather exposure. The deeper drop allows smooth door function in spite these conditions, which can otherwise cause door bottoms to drag and stick.

FINISHES: CA, MB, WP

AVAILABLE SIZES: Can be manufactured to any length from 12" to 96"


OPTIONS: FX - Intumescent **SF** - Security Fasteners


- · For use on doors with an excessive undercut or uneven floor.
- · Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1-1/2" drop.
- Unit supplied with 1 pair of end caps Part #4093EC-CA or #4093EC-MB

#7093-FX (4) #7593-FX (4) #7793-FX (4) **29/32** (22.9) - **29/32**"(22.9) — INTUMESCENT INTUMESCENT 1-1/2" Max. Drop

#7593-FX may be used to restore lost fire ratings due to excessive gaps at the bottom of the door up to 1-1/2" when installed per NFPA 80.

#7093 (4)

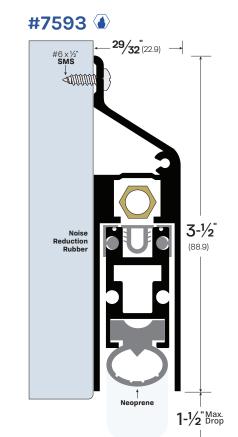

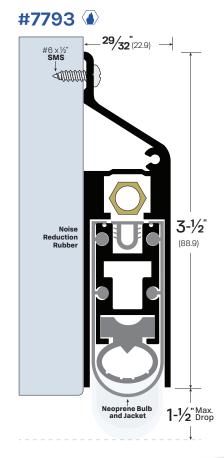

FINISHES: CA, MB, WP


AVAILABLE SIZES: Can be manufactured to any length from 12" to 96"

OPTIONS: FX - Intumescent **SF** - Security Fasteners

- For use on doors with an excessive undercut or uneven floor.
- · Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 1-1/2" drop.
- Unit supplied with 1 pair of end caps Part #4093EC-CA or #4093EC-MB



#545DP Corner Dust Plug



FINISHES: BK, GY, WH



HOW TO ORDER: #545DP

LEGACY	NGP	РЕМКО	ZERO
545DP	54CP	ACP112BL	2541



PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

#7053CA-LL



Air Flow

This option allows free flow of air while still blocking light at the bottom of the door. Useful for applications with pressure differentials, such as boiler room doors, it is also a practical solution for certain hotel room and stairwell applications.

Our AIR design features double rows of notched and staggered neoprene seals for effective air flow. Legacy automatic door bottoms offered with the AIR option include a unique mortised model for wood doors, along with standard semi-mortised and surface-mounted models.


LEGACY	7053-AIR	7153-AIR	7253-AIR
NGP	-	-	-
РЕМКО	-	-	-
ZERO	-	-	-

AVAILABLE SIZES: Can be manufactured to any length from 12" to 144"

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- · Self-leveling door seal up to maximum 1" drop.
- Replacement neoprene Part #4033N
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB



#7053-AIR



FINISHES: CA

OPTIONS:


LS - Light Spring **PULL** - Pull Out

EA - Electrical Actuator PV - Pivot Door SF - Security Fasteners



#7053CA-AIR

#7153-AIR



FINISHES: CA, BK, WP

OPTIONS:


PULL - Pull Out

EA - Electrical Actuator PV - Pivot Door LS - Light Spring

SF - Security Fasteners

#7153CA-AIR

#7253-AIR



FINISHES: CA, BK, WP

OPTIONS:


EA - Electrical Actuator PV - Pivot Door LS - Light Spring SF - Security Fasteners

PULL - Pull Out



#7253CA-AIR

#7053-LL



Mortised

FINISHES: CA

AVAILABLE SIZES - Can be manufactured to any length from 12" to 48"

OPTIONS:

EA - Electrical Actuator LL - Lead Lined

PV - Pivot Doors

SL - Sliding Doors SF - Security Fasteners TD - Top Door Installation


PULL - Pull Out

NOTES:

- · Lead Lined material for X-Ray protection
- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 3/8" drop.
- Unit supplied with 1 pair of end caps Part #4063EC-CA or #4063EC-MB
- Effective drop 1/4"

LEGACY	NGP	РЕМКО	ZERO
7053-LL	222NN-LL	-	-

#7153-LL



Surface-Mounted

FINISHES: CA, BK, WP

AVAILABLE SIZES - Can be manufactured to any length from 12" to 48"

PV - Pivot Doors

EA - Electrical Actuator LL - Lead Lined PULL - Pull Out

SF - Security Fasteners **TD** - Top Door Installation

SL - Sliding Doors




NOTES:

- Lead Lined material for X-Ray protection
- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 3/8" drop.
- Unit supplied with 1 pair of end caps Part #4153EC-CA or #4153EC-MB

LEGACY	NGP	РЕМКО	ZERO
7153-LL	222NN-LL	-	-

#7253-LL



Semi-Mortised

FINISHES: CA, BK,WP

AVAILABLE SIZES - Can be manufactured to any length from 12" to 48"

OPTIONS:

EA - Electrical Actuator LL - Lead Lined

PV - Pivot Doors SL - Sliding Doors

TD - Top Door Installation SF - Security Fasteners



#7253CA-LL

NOTES:

Lead Lined material for X-Ray protection

- Adjusting the brass nut changes pressure on concealed internal spring to satisfy field conditions.
- Self-leveling door seal up to maximum 3/8" drop.
- Unit supplied with 1 pair of end caps Part #4153EC-CA or #4153EC-MB

LEGACY	NGP	PEMKO	ZERO
7253-LL	222NN-LL	-	-


End Caps

• Standard finish is Clear Anodized Aluminum (CA). Pair supplied standard as noted below.


Optional end cap for mortised door bottoms with the PULL option. Specify #749EC to order.

Matte Black (MB) finish option is available. Example Order: #4153EC-MB

#749EC

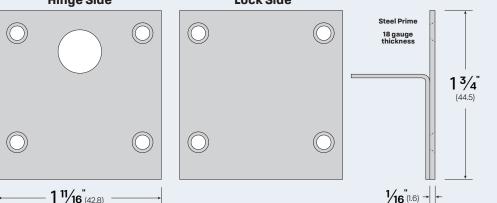


Hinge Side Lock Side



#4153EC

#2INCHNUT



Longer than standard hexnut (1-1/4").

between the door and frame.


· Compensates for unusually large gap

#4153EC-CA or #4153EC-MB

Pair supplied standard with: #7153, #7253


#4123EC

#749EC-SP



#4123EC-CA or #4123EC-MB Pair supplied standard with: #7123


#4063EC

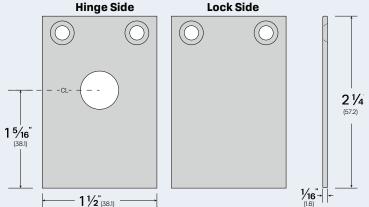

#4063EC-CA or #4063EC-MB


Pair supplied standard with: #7053, #7063, #7463, #7963

#4023EC

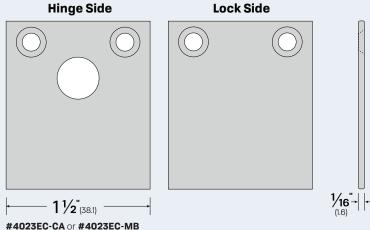

Pair supplied standard with: #7023, #7323

#4163EC



Pair supplied standard with: #7163, #7263, #7563, #7663, #7763, #7863

How To Order: **Door Sweeps**

Easy Ways To Order


Email Orders@LegacyLLC.com

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

PART NUMBER FINISH - OPTIONS - LENGTH

Phone

7823	CA	, - _L	LIG	 36
•				
•				
•				
				
The state of the s				

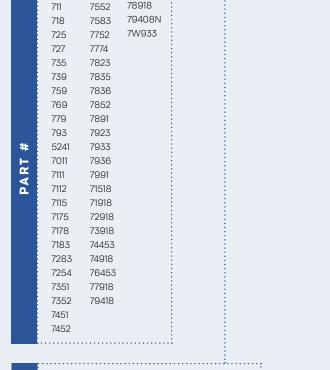

Finishes vary by product. Please check available finishes listed for each product. CA - Clear Anodized Aluminum MA - Mill Aluminum **BK** - Black Anodized Aluminum DB - Dark Bronze Anodized Aluminum MB - Matte Black Powder Coat WP - White Powder Coat **BR** - Architectural Bronze

S	Options vary by product. Ple	ease check available options listed for each produc
Z	Blank - No Option	ORB - Oil-Rubbed Bronze
2	AIR - Air Flow FL - Fire Label	POL - Polished Bronze PSA - Pressure Sensitive Adhesive
PTI	LIG - Ligature Resistant	SF - Security Fasteners
0	NIT - Nitrile Extrusion	

LENGTH

Please specify to nearest 1/16"




EXAMPLE #7823CA-LIG-36

#7933SS










MADE IN USA

13/4" (44.5)

#7W933 🛦



FINISHES: CA, BK, WP, BR


OPTIONS:


POL - Polished Bronze **LIG** - Ligature Resistant **SF** - Security Fasteners

POL - Polished Bronze FL - Fire Label **LIG** - Ligature Resistant **SF** - Security Fasteners **ORB** - Oil-Rubbed Bronze

LEGACY	NGP	РЕМКО	ZERO
7W933	197A	321	339WA

#**7823 (4) (9)**





FINISHES: CA, BK, WP, BR **OPTIONS:**

LIG - Ligature Resistant


FL - Fire Label

LIG - Ligature Resistant **ORB** - Oil-Rubbed Bronze

POL - Polished Bronze SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
7823	137A	319N	328AA


#793 (1)



FINISHES: MA, DB, MB, WP, SS **OPTIONS: SF** - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
793	200N	315CN	39A


#7836 (1)



FINISHES: MA, DB, MB, WP, SS **OPTIONS: SF** - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7836	199N	315KN	39WA

#7936

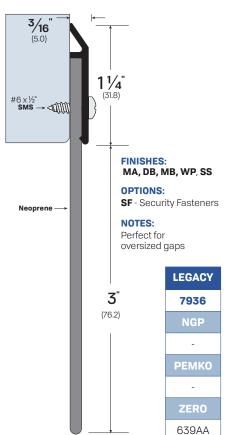

#7923

FINISHES: CA, BK, WP, BR

ORB - Oil-Rubbed Bronze

198A


321N

339AA

OPTIONS:

FL - Fire Label

LEGACY 7933




FINISHES: CA, BK, WP, BR

BR - Architectural Bronze **POL** - Polished Bronze **ORB** - Oil-Rubbed Bronze **SF** - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7923	198A	-	329AA

#7583



FINISHES: CA, BK, WP

OPTIONS: FL - Fire Label


SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
7583	-	-	-



Door Sweep #7933CA mounted to a door.


ADJUSTABLE DOOR SWEEPS




FINISHES: CA, BK, WP OPTIONS: SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
7178	140P	351_P	871AA

#7175



FINISHES: CA, BK, WP OPTIONS: SF - Security Fasteners



FINISHES: CA, BK, WP **OPTIONS: SF** - Security Fasteners

	LEGACY	NGP	PEMKO	ZERO
	7552	140P	351_P	255A

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

LEGACY

7175


571AA

PEMKO ZERO



Door Sweep #74918 mounted to a pair of doors.

#74918




FINISHES: CA, BK, WP

OPTIONS:

FL - Fire Label SF - Security Fasteners

PSA - Pressure Sensitive Adhesive

LEGACY	NGP	PEMKO	ZERO
74918		308APK	8194AA




FINISHES: CA, BK, WP

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
71918	97V	307	8191AA

#71918



FINISHES: CA, BK, WP


#7774

OPTIONS: FL - Fire Label

NOTES: End caps available by request #474CA-EC

LEGACY	NGP	PEMKO	ZERO
7774	678	29326	477AA

#73918



FINISHES: CA, BK, WP


OPTIONS:

SF - Security Fasteners

PSA - Pressure Sensitive Adhesive

LEGACY	NGP	РЕМКО	ZERO
73918	A605	18041CNB	8193AA

#72918



FINISHES: CA, BK, WP


OPTIONS:

PSA - Pressure Sensitive Adhesive

SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
72918	C607	18061ANB	8192AA

#718




FINISHES: CA, BK, WP

NOTES: End caps available by request #474CA-EC

LEGACY	NGP	PEMKO	ZERO
718	672	-	-

#79408N

SS - Stainless Stee

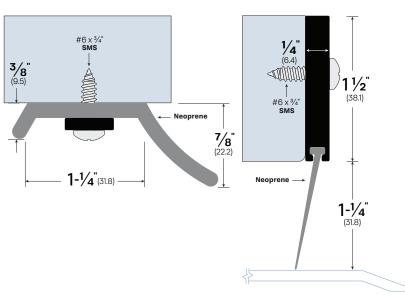

FINISHES: MA, SS

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
79408N	-	-	8049R


FINISHES: MA, MB, WP

#759

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
759	-	-	95AA

#779




FINISHES: MA, MB, WP

OPTIONS: SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
779	-	-	-

#769




OPTIONS: SF - Security Fasteners

FINISHES: MA, MB, WP

PRODUCT CATALOG #24

LEGACY	NGP	РЕМКО	ZERO
769	D608	-	96A


#7835



FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
7835	202N	368_N	539AA

#739




FINISHES: MA, MB, WP, SS

OPTIONS: SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
739	81369N	E199X196A	93A



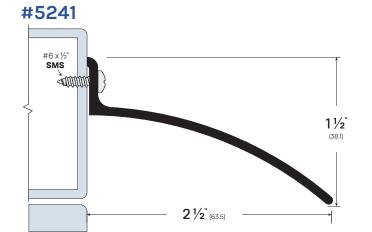


FINISHES: MA, MB, WP, SS

OPTIONS: SF - Security Fasteners

- Top of door rain drip
- Order length should be specified a minimum of 4" longer than door width.

LEGACY	NGP	РЕМКО	ZERO
5241	16	346C	142AA

#77918




FINISHES: CA, BK, WP

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
77918	101V	345AV	8197AA

#78918




FINISHES: CA, BK, WP

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
78918	C627	3452ANB	8198AA

#711




FINISHES: CA, MB, WP


OPTIONS: SF - Security Fasteners

LEGACY	NGP	PEMKO	ZERO
711	17	345C	11A

For Overhead Doors



#727MA




FINISHES: MA

LEGACY	NGP	РЕМКО	ZERO
7254MA	-	-	452A

LEGACY

PEMKO **727MA** 72A

#725MA



FINISHES: MA


LEGACY	NGP	РЕМКО	ZERO
725MA	-	-	52A

Mortised AIR Sweep

This option allows free flow of air while still blocking light at the bottom of the door. Useful for applications with pressure differentials, such as boiler room doors, it is also a practical solution for certain hotel room and stairwell applications.


Our AIR design features double rows of notched and staggered neoprene seals for effective air flow.

#76453



OPTIONS: AIR - Air Flow

LEGACY	NGP	РЕМКО	ZERO
76453	12T	-	3546A




FINISHES: MA

LEGACY	NGP	PEMKO	

#7283

#76453CA




FINISHES: CA

OPTIONS: AIR - Air Flow

LEGACY	NGP	РЕМКО	ZERO
7283	-	-	-

#74453




FINISHES: MA

OPTIONS: AIR - Air Flow

LEGACY

74453



1 3/4" (44.5)


FINISHES: MA

#735



LEGACY	NGP	РЕМКО	ZERO
735	116N	313AN	53A

#7183



FINISHES: MA **OPTIONS: AIR** - Air Flow


Υ	NGP	РЕМКО	ZERO	LEGACY	NGP	РЕМКО	ZERO
	116N	313AN	53A	7183	-	-	381A

FINISHES: MA


PEMKO ZERO

153A

#7451



#7752



MA - Mill Aluminum MB - Matte Black Powder Coat WP - White Powder Coat SS - Stainless Steel

FINISHES: MA, MB, WP

OPTIONS:

FX - Intumescent NIT - Nitrile Extrusion

SF - Security Fasteners

113N

FINISHES: MA, MB, WP

OPTIONS: SF - Security Fasteners

- Grey pile brush standard
- Specify for black pile (PB-BK) or white pile (PB-WH)

LEGACY	NGP	РЕМКО	ZERO
7451	-	-	154A

FINISHES: MA, MB, WP


OPTIONS:

FX - Intumescent


SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7752	-	-	-


#7111



#7011



#7112



FINISHES: MA, MB, WP

OPTIONS:

FX - Intumescent

LEGACY

7111

26N

NIT - Nitrile Extrusion

SF - Security Fasteners

FINISHES: MA, MB, WP

OPTIONS: SF - Security Fasteners

NOTES:

- Grey pile brush standard
- Specify for black pile (PB-BK) or white pile (PB-WH)

FINISHES:	MA, MB, WP
-----------	------------

OPTIONS:

FX - Intumescent

SF - Security Fasteners


LEGACY	NGP	PEMKO	ZERO
7011	-	-	110A

LEGACY	NGP	PEMKO	ZERO
7112	36ET6	2173AV	-

#71518

LEGACY

7351




FINISHES: MA, MB, WP

OPTIONS: SF - Security Fasteners


NGP PEMKO ZERO

8151AA

#79418



#7115



FINISHES: MA, MB, WP


OPTIONS: SF - Security Fasteners

FINISHES: MA, MB, WP, SS

OPTIONS: SF - Security Fasteners


NOTES: Neoprene is 6" wide and can be mounted at different heights.

LEGACY	NGP	PEMKO	ZERO	LEGACY	N
79418	D648	90100	8149AA	7115	141



7115 14RA	-	511A


#7352




PEMKO ZERO

111AA

#7452



#7852



FINISHES:, MA, MB, WP

112N

OPTIONS: NIT - Nitrile Extrusion

FINISHES: MA, MB, WP

- Grey pile brush standard
- Specify for black pile (PB-BK) or white pile (PB-WH)

LEGACY	NGP	PEMKO	ZERO
7452	254P	-	254A

FINISHES: MA, MB, WP **OPTIONS: FX** - Intumescent

LEGACY	NGP	РЕМКО	ZERO
7852	12T	33V3_V	-

LEGACY

71518

253A

PEMKO ZERO


234APK

LEGACY

7352



#793SS




FINISHES: SS

OPTIONS:

SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
793SS	200NSS	31555SS	-

#7836SS




FINISHES: SS

OPTIONS:


SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7836SS	-	-	-

#7936SS

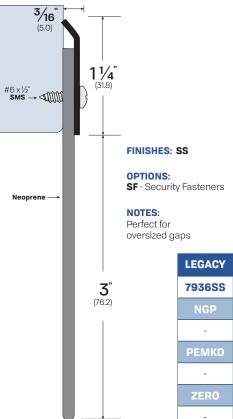


#7891SS



FINISHES: SS OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7891SS	-	-	-


#7991SS

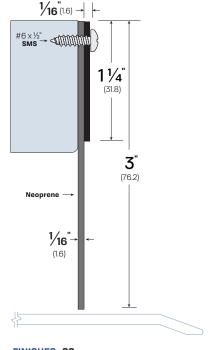

FINISHES: SS **OPTIONS: SF** - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7991SS	-	-	-

#**7**115SS



FINISHES: SS

OPTIONS: SF - Security Fasteners

NOTES: Neoprene is 6" wide and can be mounted at different heights.

LEGACY	NGP	РЕМКО	ZERO
7115SS	-	-	-

How To Order: Thresholds

Example #30756BR-EPX-36-FA24

Easy Ways To Order

Email Orders@LegacyLLC.com


Phone

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

#3465MA

#30756BR



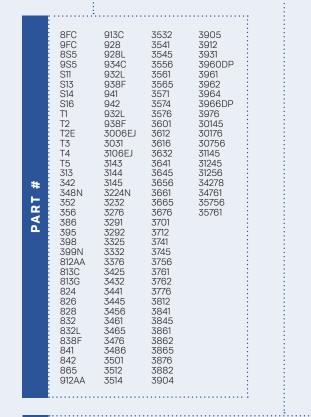

Finishes vary by product. Please check available finishes listed for each product.

MA - Mill Aluminum

MB - Matte Black Powder Coat **BR** - Architectural Bronze

SS - Stainless Steel

ST - Steel

Options vary by product. Please check available options listed for each product.

Blank - No Option ACF - Aluminum Composite Filler ORB - Oil-Rubbed Bronze

EPX - Epoxy Abrasive

FL - Fire Label LA - Lead Anchors LIG - Ligature Resistant

PEPX - Photoluminescent Epoxy Abrasive POL - Polished Bronze

RUB - Rubber Grip

LENGTH Please specify to nearest 1/16"

FASTENERS


Fastener Options - FA21 - FA22 -FA 23 - FA24 - FA26 (see page 28 for details)

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA **PRODUCT CATALOG #24** WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM MADE IN USA This exceptionally strong, slip-resistant surface provides maximum durability and safety, especially for high-traffic outdoor applications. Ideal for parks, schools, hospitals, and industrial buildings. The epoxy abrasive particle mix is bonded to the aluminum base.





GRIP (RUB)

Typically used for interior applications. In place of conventional rubber inserts, our unique process chemically applies non-slip rubber to threshold grooves for enhanced grip and strength.



COMPOSITE FILLER (ACF)

Strengthens and reinforces thresholds to prevent bending or crushing under high-traffic and heavyweight use in schools, industrial and manufacturing plants, and other high-stress applications.

EPOXY ABRASIVE (PEPX)


Threshold grooves are filled with a proprietary photoluminescent epoxy that emits luminescence after charging by exposure to ambient light. Specify for compliance with code requirements for photoluminescent stairwell and exit path markings.

Floor Closer Cover Plates For use on thresholds that are 7" or wider. Left hand shown on all diagrams below. Specify handing with RH or LH.


Type 1 For doors hung in center








For doors hung flush with face of frame



For use with offset closers and pivot sets



Fasteners / Anchors




#FA26 Stainless Steel Sleeve Anchor 1/4 x 3" Long Plastic Shields For Wood Screws
Plastic Shields For Wood Screws
#FA21 #10 Flat Phillips SMS (Screw lengths: 1-1/4", 1-1/2", or 1-3/4")
#FA22 Lead Shields For Wood Screws #10 Flat Phillips SMS (Screw lengths: 1-1/4", 1-1/2", or 1-3/4")
#FA23 Anchors With 10-24 Machine Screws MSLA-10
#FA24 Anchor With 1/4 -20 Machine Screw MSLA-4




FINISHES: MA, BR


OPTIONS: ACF, EPX, FL, LA, PEPX, RUB

NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"




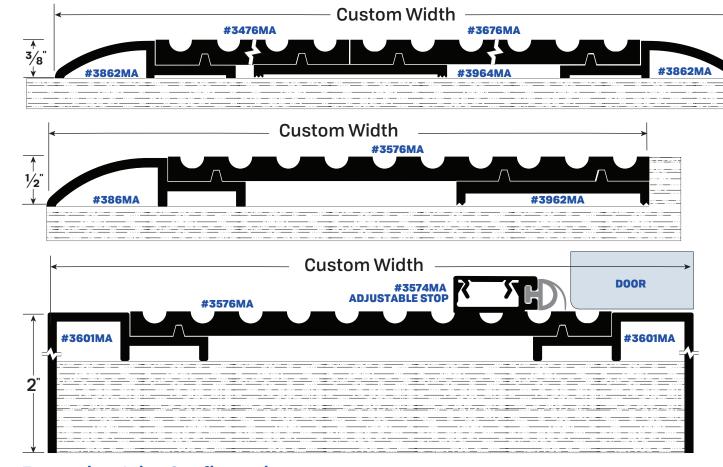


Expansion Joint Configurations

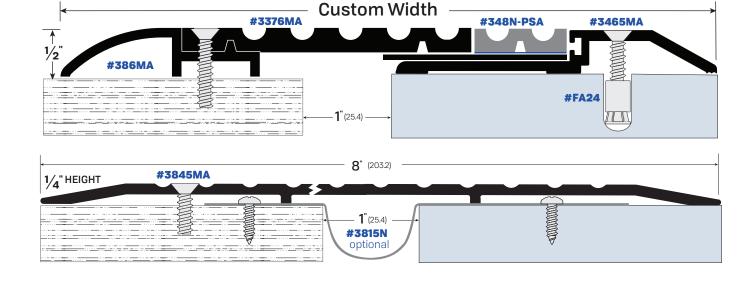

PRODUCT CATALOG #24

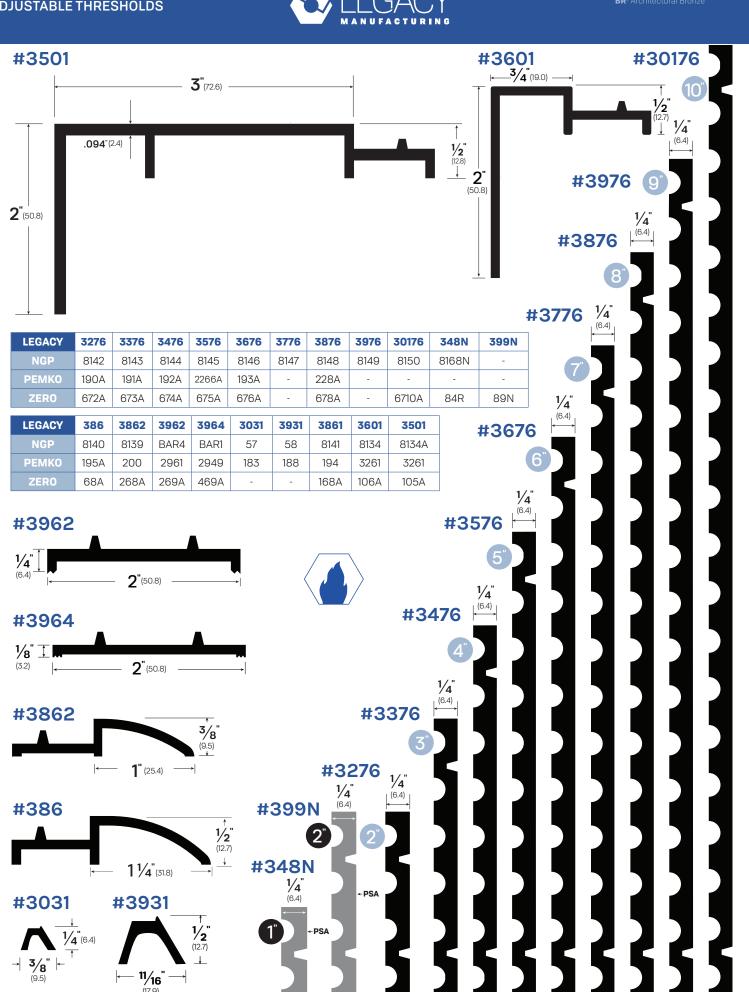

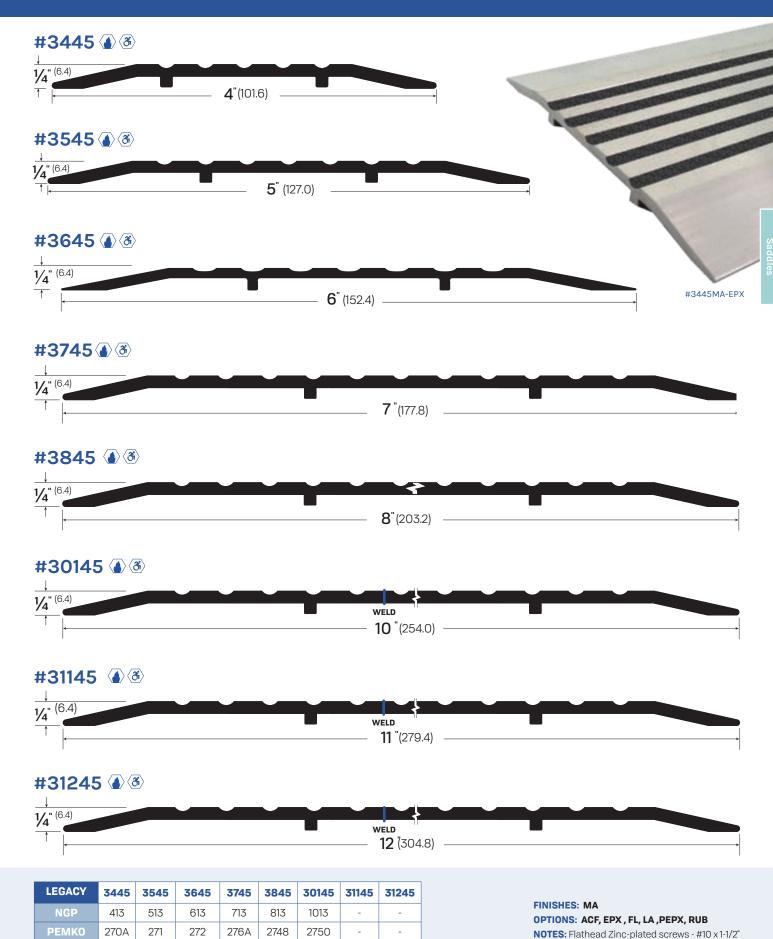

546A

547A

548

544A 545A







LEGACY	3456	3461	3556	3656	3756	35756
NGP	424	412	425	426	425E	8745
РЕМКО	170A	175	1665A	172	176A	-
ZERO	654A	164A	655A	656A	8655A	657A

FINISHES: MA, BK, BR

OPTIONS: ACF, EPX, FL, LA, PEPX, RUB

NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"

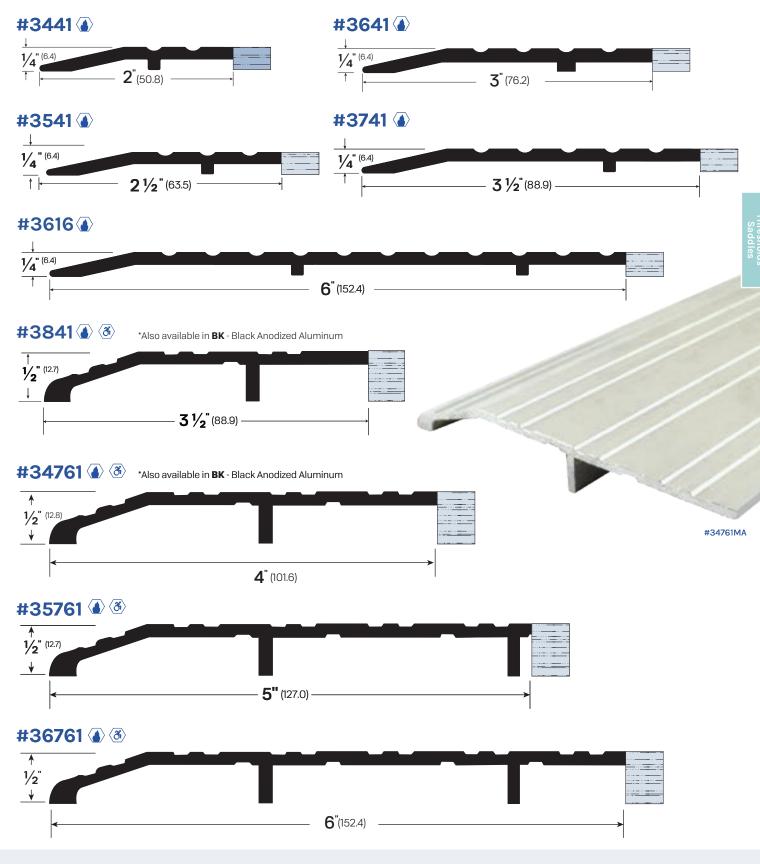



FINISHES: MA, BK **OPTIONS:** ACF, EPX, FL, LA, PEPX, RUB NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"





LEGACY	3143	3144	3145	3486	342	352	3574	313
NGP	-	-	-	404	-	-	-	2
РЕМКО	-	-	-	2364A	-	-	-	-
ZERO	-	-	-	-	-	-	-	-

OPTIONS: LIG - Ligature Resistant FL - Fire Label S-WH - White Silicone

FINISHES: MA

OPTIONS: LIG - Ligature Resistant **FL** - Fire Label **S-WH** - White Silicone

OPTIONS: ACF, EPX , FL, LA , PEPX, RUB


NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"


1/2 " (12.5)					
<u>(12.0)</u>	4 "(101.	.6)			
# 3905 (4)	. (
½ " (12.5)			444		
1 (12.0)		5 "(127.0)			#390
<u> </u>		(12.10)		1	
#3291 🚯			#3425 🚯		
		7/8" Silicone (22.2)	7 /8" (22.2)		
	1	<u> </u>			اليًا.
ļ	3 "(76.2) —	→	←	— 2 ²⁹ / ₃₂ " _(73.6) —	
#3325 🚯			#3292 🕢		
				1/2" (12.7)	
7/8 " (22.2)			11/16	Silicone	
	2 ²⁹ / ₃₂ " (73.6)		, ,		
	Z - /32 (73.6)				
#395 🕢			V-		
1/2" (12.7)					
<u> </u>	3 "(76.2)	Silicone	OR		1
· · · · · · · · · · · · · · · · · · ·	 3 "(76.2)				1
#398 ()					#395
1/2" (12.7)	****				
<u> </u>	 4 " (101.6	,	Silicone	↓ DOOR	


LEGACY	3904	3905	3291	3425	3325	3292	395	398	
NGP	324	325	-	-	-	-	-	-	
РЕМКО	227	229	-	-	-	-	-	-	
ZERO	1674	1675A	-	524A	523A	226A	-	-	


FINISHES: MA **OPTIONS:** ACF, EPX, FL, LA, PEPX, RUB NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"

MB - Matte Black Powder Coat WP - White Powder Coat

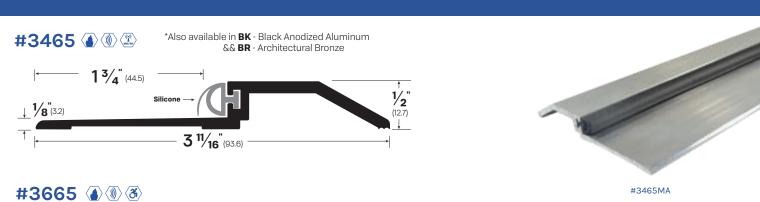




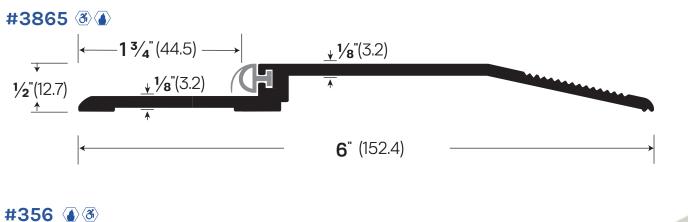

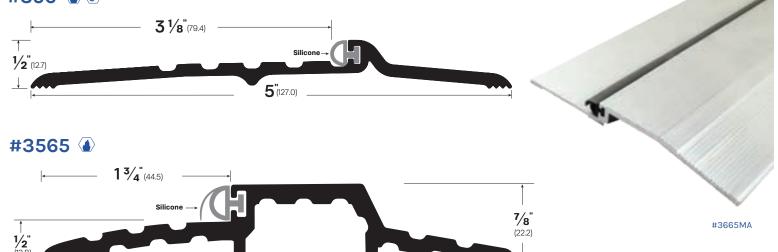

LEGACY	3465	3665	3865	356	3565
NGP	8155N	950N	-	896N	897N
РЕМКО	2008APK	2005Q	-	2005AT	277
ZERO	564A	566A	568A	65A	565A

FINISHES: MA, BK, BR **OPTIONS:** ACF, EPX , FL, LA , PEPX, RUB NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"

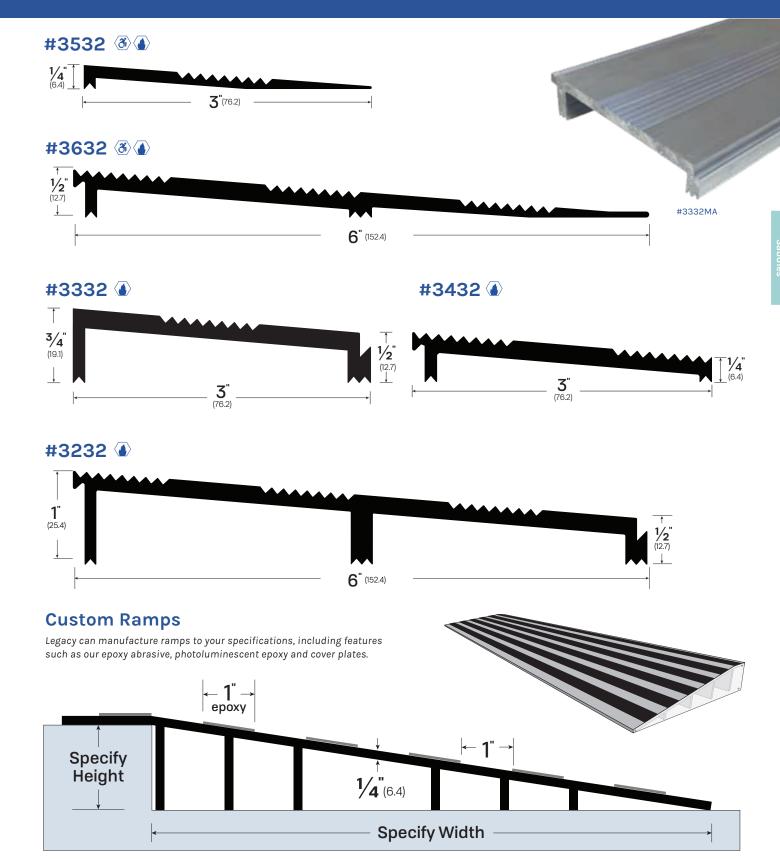

LEGACY	3232	3332	3432	3532	3632
NGP	954	953	-	-	R50
РЕМКО	RAMP5	RAMP5A	-	-	RAMP4A
ZERO	232	233	234	235	236

FINISHES: MA **OPTIONS: ACF, EPX, FL, LA, PEPX, RUB** NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"

4 7/8" (123.8)

#9T3-MA

PRODUCT CATALOG #24

6 1/4"(158.8)


WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM


MADE IN USA


PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

lower outside edge for water drainage.

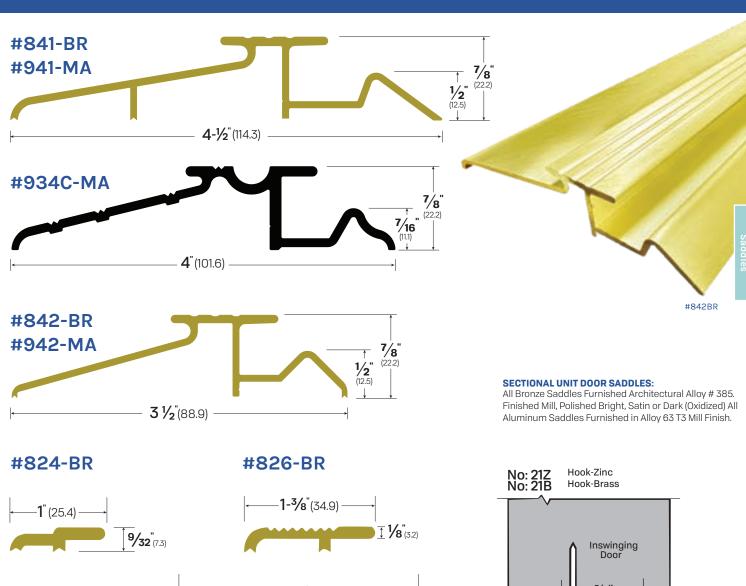

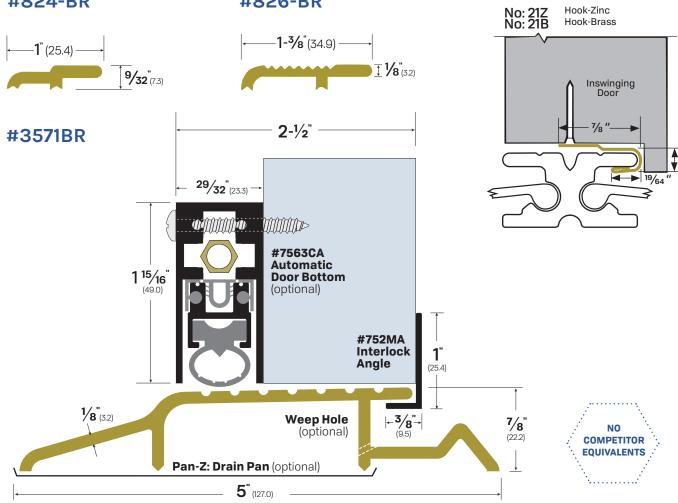

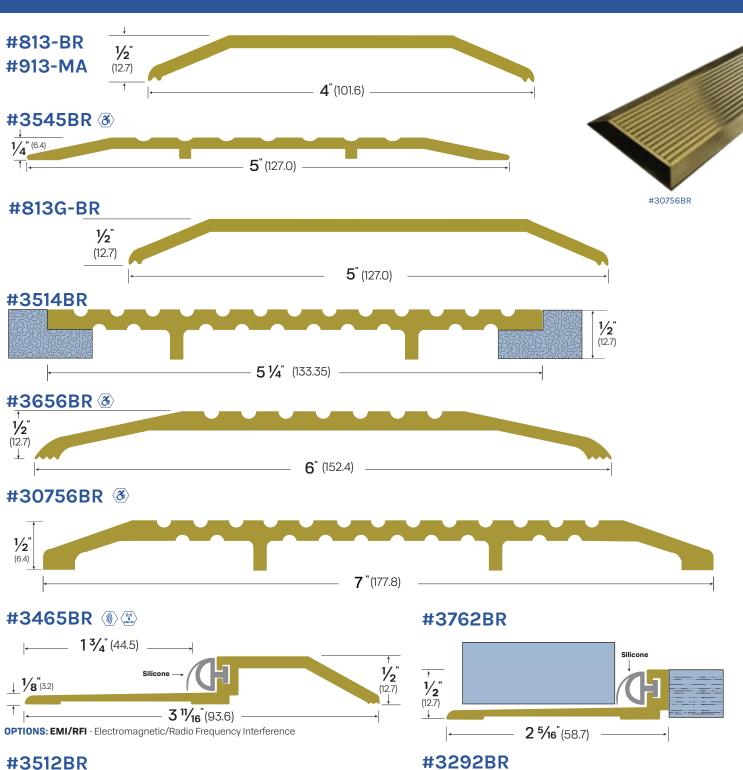


			(33.1)	1
\$3512BR		#3292BR		
1/2" (12.7) 	3 11/ ₁₆ " (93.7)	DOOR	1 ¹¹ / ₁₆ " (42.9)	

LEGACY	3545BR	3656BR	3514BR	30756BR	3465BR	3762BR	3512BR	3292BR
NGP	513BR	426B	-	427BR	-	-	-	-
РЕМКО	271B	172B	-	176B	-	-	-	-
ZERO	545B	656B	-	657B	564B	-	-	-

FINISHES: MA, BR


OPTIONS: ACF, EPX, FL, LA, PEPX, RUB

NOTES: Flathead Zinc-plated screws - #10 x 1-1/2"

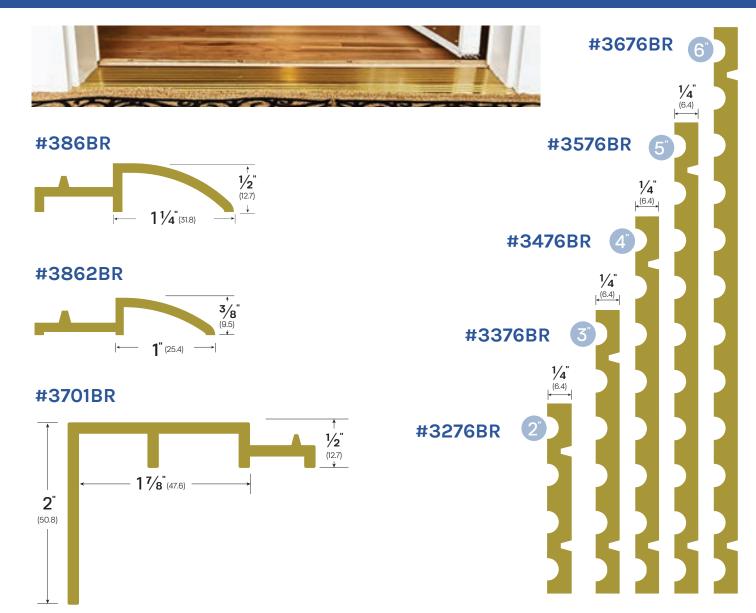

 $\textbf{Various Configurations} \quad \textbf{\textcircled{6}} \quad \textbf{Configurations made from adjustable bronze thresholds}.$

#3276BR

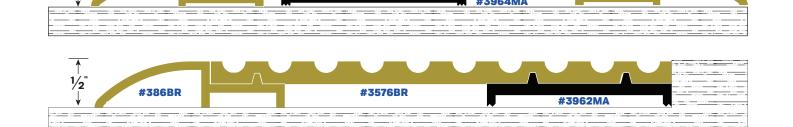

#3376BR

LEGACY	386BR	3862BR	3701BR	3276BR	3376BR	3476BR	3576BR	3676BR
NGP	8140BR	-	8134BR	8142BR	8143BR	8144BR	8145BR	8146BR
РЕМКО	195B	-	3261B	190B	191B	192B	-	193B
ZERO	68B	268B	107B	672B	673B	674B	675B	676B

FINISHES: MA, BR **OPTIONS:** ACF, EPX , FL, LA ,PEPX, RUB NOTES: Flathead Zinc-plated screws - #10 x 1-1/2" * Can be manufactured in both Aluminum and Stainless Steel.



#3106EJ (3)




FINISHES: MA, SS

OPTIONS: ACF, EPX, FL, LS, PEPX, RB

AVAILABLE SIZES: Specify for custom widths up to 48", lengths up to 120" NOTES: Edges are not beveled and plates are not drilled unless specified.

#3960DP DIAMOND TREAD PLATE




FINISHES: MA, SS, ST

AVAILABLE SIZES: Width Range: 2" - 48" - Length Range: 12" - 144"

NOTES: Edges are not beveled and plates are not drilled unless specified.

DIAMOND-PLATE BULKHEAD THRESHOLDS

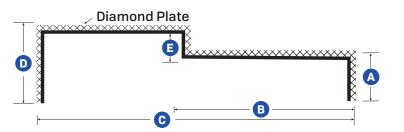


FINISHES: MA, SS, ST


NOTES:

• Custom order - Specify dimensions of A, B, C, D


- E dimension must be 1"
- Drawing is not drawn to scale




LEGACY	3006EJ	3106EJ	3960DP	3966DP
NGP	818	814	828	-
РЕМКО	18/1A	14/1A -		-
ZERO	600CP	601CP	-	669DP

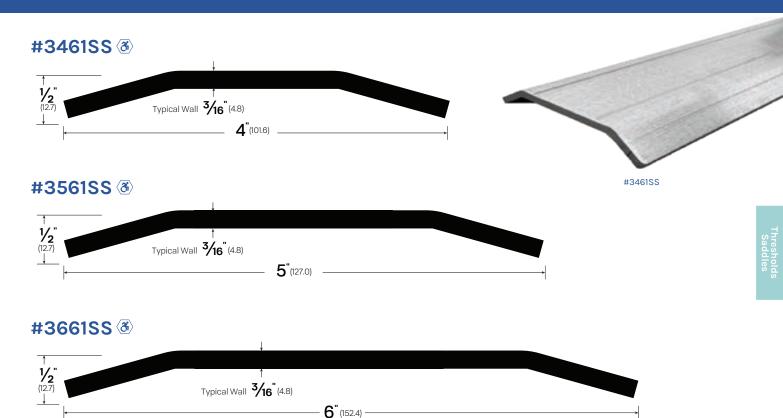







LEGACY	3461SS	3561SS	3661SS	3761SS	3861SS	3961SS
NGP	412SS	512SS	612SS	712SS	812SS	-
РЕМКО	175SS	154SS	-	-	-	-
ZERO	664ST	-	-	-	-	-

FINISHES: SS

OPTIONS: ACF, EPX, LS, FL, PEPX, RUB

NOTES: Flathead Zinc-plated screws - #10 x1-1/2"

How To Order: Self-Adhesive Gasketing

Example #5881S-BK-PSA-17FT

Easy Ways To Order

Email Orders@LegacyLLC.com **Phone**

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

PART NUMBER -COLOR - OPTIONS - LENGTH (FT) **5881S**

5814SPR 2S 3S 4S 5848S 5881S 5883S 5S 6S 7S 5884S 7177S 7277S 42PB 50517S 413PB 50518S 423PB 50519S 443PB 50778SPR 5018SPR 50878SPR 5088S 5118SPR 524088 5213SPR 52718SPR 53408SPR 5258SPR 53508F 5428S 54418S 5628SPR 55418S 5658S 561288 5711S 77128S

> Materials standard as noted for each part. Please check available colors listed for each product.

BW - Brown CL - Clear

5813SPR

GY - Grev **WH** - White

Options vary by product. Please check available options listed for each product.

Blank - No Option FX - Intumescent

OPTIONS

LIG - Ligature Resistant


PSA - Pressure Sensitive Adhesive

LENGTH Please specify to nearest 12"

Silicone with Pressure Sensitive Adhesive (PSA)

#5881S (A) (2) (3)






#5883S (A) (2) (3)

COLORS: BK, BW, CL, GY, WH **OPTIONS: FX, LIG**

+ 1/2 (12.7) →




COLORS: BK, BW, CL, GY, WH

#56128S **(4)**




OPTIONS: FX, LIG



#5884S (A) (2) (3)

COLORS: BK, BW, CL, GY, WH **OPTIONS: FX, LIG**


#5711S 🐠




#55418S **4**

COLORS: BK, WH **OPTIONS: LIG**


#5428S 🚹




COLORS: BK, WH OPTIONS: LIG



COLORS: BK, WH OPTIONS: LIG



COLORS: BK, CL, GY, WH **OPTIONS: LIG**




#52408S 🐠 🖤

COLORS: BK, WH **OPTIONS: LIG**


#54418S 🕢

#50517S (4) (1)




COLORS: BK, CL, WH

#50518S (4) (1)



COLORS: BK, CL, WH **OPTIONS: LIG**





COLORS: BK OPTIONS: LIG

3M / / / / / / / / / / / / / / / / / / /	7/16 (11.1)
<u> </u>	

LEGACY	5881S	5883S	5884S	50517S	50518S	50519S
NGP	5050C	-	2525C	5075C	-	-
РЕМКО	S88BL	PK55BL	PK33BL	S773BL	-	S776BL
ZERO	188S-BK	-	488S-BK	-	8150S-BK	-

LEGACY	5428S	54418S	55418S	56128S	52408S	5711S
NGP	-	5020	2525Bx5040B	-	5070C	5040
РЕМКО	-	S442BL	-	-	-	S44
ZERO	824N	8144S-BK	8145S-BK	8216S-BK	8042S-BK	117S-BK




Kerf Gasketing Silcone except as noted.

#1S




COLORS: BK, BW, GY, WH

#2S



COLORS: BK, BW, GY, WH

#3S




COLORS: BK, WH




COLORS: BK, WH

#5S



COLORS: BK, WH

#6S



COLORS: BK, WH


#7S



COLORS: BK, WH


#5088S

#4S




COLORS: BK, BW, WH

#50188S




COLORS: BK, WH

#5658S




COLORS: BK, WH

#5848S



COLORS: BK

#53408SPR



COLORS: BK MATERIAL: Sponge Neoprene

5S

8841R

6S


8043N

7S


53518F

PF183 Q106

#5258SPR




COLORS: BK MATERIAL: Sponge Neoprene



COLORS: BF, BKF, WF **MATERIAL: Foam**

#53518F



18

LEGACY

	LEGACY	5088S	50188S	5658S	5848S	53408SPR	5258SPR
	NGP	-	-	-	-	-	-
	РЕМКО	-	-	-	-	-	-
F	ZERO	8800S-BK	8810S-BK	8056Y	8048S-BK	8043N	8052N

2S

3S

4S


Sponge Rubber (SPR)


- NOTES:
 SPR is black Neoprene.
- Pressure Sensitive Adhesive (PSA) standard

#52718SPR

#50878SPR








#5213SPR

3/16 (4.8)


#5813SPR

-<mark>1/2</mark>" -


#5018SPR




#5118SPR



#50778SPR



#5628SPR



#5814SPR



Silicone Gasketing (S)

#7177S



COLORS: BK, CL, WH



COLORS: BK, CL, WH



COLORS: BK, WH



#5813SPR

Pile Brush

#413PB



COLORS: GY OPTIONS: PSA

#423PB



COLORS: GY, BK OPTIONS: PSA

#443PB



COLORS: GY, BK OPTIONS: PSA

#42PB



COLORS: BK, WH OPTIONS: PSA

Easy Ways

To Order

513

523

589

599

5001

5041

5071

5072

5074

5075

5077

5178

CA

|--|

5552

5574

5583

5584

5623

5823

5873

5874

5903

5924

5974 5078SPB 50777 51888 52888 53038


5077SPB 5924L-EXT

5203-FX 59150


5823SPB

_	
	ı











Perimeter seals are available in Aluminum and Steel in various options. Please check available finishes listed for each product.

CA - Clear Anodized Aluminum

MA - Mill Aluminum

BK - Black Anodized Aluminum

DB - Dark Bronze Anodized Aluminum

MB - Matte Black Powder Coat

WP - White Powder Coat

BR - Architectural Bronze

SP - Grey Steel Prime

Options vary by product. Please check available options listed for each product.

Blank - No Option

EMI/RFI - Electromagnetic/Radio

FOAM - Foam Insert FX - Intumescent

LIG - Ligature Resistant

Frequency Interference FL - Fire Label

PB-BK - Black Pile Brush PB-GY - Grey Pile Brush POL - Polished Bronze PSA - Pressure Sensitive Adhesive RS - Access Control Ribbon Switch

S-WH - White Silicone SF - Security Fasteners

LENGTH Please specify to nearest 1/16"

$1^{5/32}$








PRODUCT CATALOG #24


#5077SPB (4) (1) 5077 5077SPB



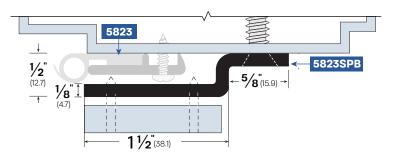

- **1 ¹/2**" (38.1)



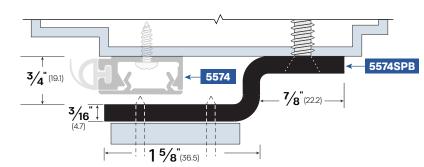

FINISHES: SP

OPTIONS: FL - Fire Label



· Closer Bracket Plate

- To be used with 5071, 5077 or parts of similar size.
- Standard length is 6"
- Specify other length if needed.

LEGACY	NGP	РЕМКО	ZERO
5077SPB	3SP	-	770SPB

FINISHES: SP

OPTIONS: FL - Fire Label

NOTES:

- Closer Bracket Plate
- To be used with 5071, 5077 or parts of similar size
- Standard length is 6"
- · Specify other length if needed.

LEGACY	NGP	РЕМКО	ZERO
5823SPB	-	-	328SPB

FINISHES: SP

OPTIONS: FL - Fire Label

NOTES:

- · Closer Bracket Plate
- To be used with 5574, 5075, 5078 or parts of similar size
- Standard length is 6"
- · Specify other length if needed.

LEGACY	NGP	РЕМКО	ZERO
5078SPB	7SP	-	870SPB






Adjustable Seals

These systems provide adjustability that helps compensate for gaps due to imperfect door alignment at installation, or resulting from temperature and humidity changes, in order to optimize sealing performance. Adjustments are made simply with a few turns of a screwdriver.



#5077CA Installed on head of frame.

#5077 (1)





OPTIONS: FL - Fire Label

EMI/RFI - Electromagnetic/Radio Frequency Interference


NOTES:

- Used with a cased open frame
- Replacement neoprene Part #4563N

LEGACY	NGP	РЕМКО	ZERO
5077	1038N	319N	770AA



#5077-FX **4**



FINISHES: CA, BK, WP, SP, SS

OPTIONS: FX - **Intumescent** for Fire/Acoustical applications


NOTES:

- · Used with a cased open frame
- Replacement FX Part #13312
- Replacement neoprene Part #4563N

LEGACY	NGP	РЕМКО	ZERO
5077-FX	-	-	770FS



#5071 🕦



FINISHES: CA, BK, WP, SP, SS


- Used with a cased open frame
- Replacement closed cell sponge neoprene Part #4363SPR

150407	NAD	DELUIZ	

103N



#50777



FINISHES: CA, BK, WP, SP, SS

5071


- Replacement closed cell sponge neoprene Part #4363SPR
- Replacement silicone Part #40777S Available in Black (-BK) and White (-WH)

350CSR

- Replacement silicone Part #4684S Available in Black (-BK) and White (-WH)
- Adjustable range is up to 5/16" (7.9)


		ZERO
50777 -	-	7770AA

Stainless Steel

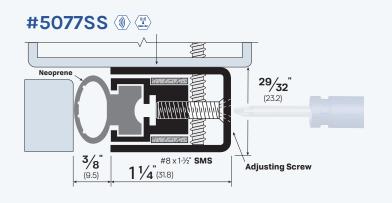

#5071SS ® Closed Cell Sponge Neopren **29/32**" (23.2)


#50777SS

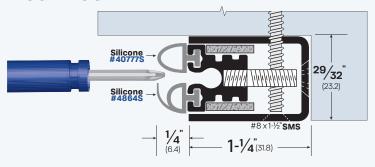

FINISHES: SP, SS

LEGACY	5077SS	5071SS	50777SS
NGP	-	-	-
РЕМКО		-	-
ZERO	770SS/770SP	170SS/170SP	7770SS/7770SP

#5924




FINISHES: MA, MB, WP

OPTIONS: FL - Fire Label

LIG - Ligature Resistant

- · Allows mounting door closer or rim exit device strikes without notching or other breaks in seal.
- · Replacement neoprene Part #4338N


#5924L-EXT

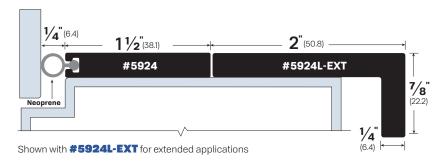

LEGACY	NGP	РЕМКО	ZERO
5924	700N	2891AS	429AA



Developed in response to customer demand, this unique design innovation eliminates the trade-off between functionality and aesthetics in mechanically fastened adjustable gasketing. The mounting screw is concealed inside a housing for a clean, uninterrupted surface along the perimeter seal. Available only from Legacy.



FINISHES: CA, BK,WP

OPTIONS:

FL - Fire Label

LIG - Ligature Resistant


S-WH - White Silicone

SF - Security Fasteners

NOTES: Self-adjusting perimeter seal with concealed screws.

LEGACY	NGP	РЕМКО	ZERO
501	-	-	-


#5552



FINISHES: CA, DB, MB, WP

LEGACY	NGP	РЕМКО	ZERO
5552	140	351CP	255AA

#5078




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant S-WH - White Silicone FL - Fire Label

LEGACY	NGP	РЕМКО	ZERO
5078	106N	379AR	870AA




FINISHES: CA, DB, MB, WP

OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone

LEGACY	NGP	РЕМКО	ZERO
5217	141N	-	712AA

#5178



FINISHES: CA, BK, WP

LEGACY	NGP	PEMKO	ZERO
5178	140P	351CP	871AA


#5075

MA - Mill Aluminum

BK - Black Anodized Aluminum

DB - Dark Bronze Anodized Aluminum


WP - White Powder Coat



FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
5075	141N	379AR	570AA

#53038




FINISHES: CA, BK, WP

OPTIONS: FL - Fire Label

PSA - Pressure Sensitive Adhesive

LEGACY	NGP	РЕМКО	ZERO
53038	135N	303PIC	8303AA

#513 🚯




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone **FL** - Fire Label

LEGACY	NGP	РЕМКО	ZERO
513	2N	300CP	31AA


#5175




FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZER0
5175	141P	-	571AA


#59150



FINISHES: MA, DB




#523



FINISHES: CA, BK, WP

PB-BK - Black Pile Brush PB-GY - Grey Pile Brush

LEGACY	NGP	PEMKO	ZERO
523	2P	300CP	32AA









PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM


MADE IN USA

#513CA

LIG - Ligature Resistant **POL** - Polished Bronze FL - Fire Label

LEGACY	NGP	РЕМКО	ZERO
5623	137N	319N	326AA

#5823 (A) (II)




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **POL** - Polished Bronze FL - Fire Label

LEGACY	NGP	РЕМКО	ZERO
5823	137N	319N	328AA

#5413




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **POL** - Polished Bronze FL - Fire Label

LEGACY	NGP	РЕМКО	ZERO
5413	134N	319AR	314AA

#5203-FX




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant POL - Polished Bronze FX - Intumescent

LEGACY	NGP	РЕМКО	ZERO
5203-FX	-	-	302FS


#51888



FINISHES: CA, MB, WP

LEGACY	NGP	РЕМКО	ZERO
51888	-	-	-

#52888




FINISHES: CA, MB, WP

LEGACY	NGP	PEMKO	ZERO
52888	-	-	-



Adjustable gasketing applied to the frame on a pair of conference room doors.

#5584 🐠 🐠




FINISHES: MA, BK, WP

OPTIONS:

LIG - Ligature Resistant FL - Fire Label NIT - Nitrile Extrusion

LEGACY	NGP	РЕМКО	ZERO
5584	152S	312AR	485A


#5583



FINISHES: MA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
5583	-	-	-

#599




FINISHES: MA, BK, WP

OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone

LEGACY	NGP	PEMKO	ZERO
599	161N	-	99A

#5574 🌢 🕦




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **FL** - Fire Label **S-WH** - White Silicone **NIT** - Nitrile Extrusion

LEGACY	NGP	РЕМКО	ZERO
5574	172N	29321-TF	475AA


#5974



FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
5974	-	-	-

#589




FINISHES: MA, BK, WP

OPTIONS:

PB-GY - Grey Pile Brush PB-BK - Black Pile Brush

LEGACY	NGP	РЕМКО	ZERO
589	161P	-	98A

#5874




FINISHES: CA, MB, WP

OPTIONS:

FL - Fire Label S-WH - White Silicone

LEGACY	NGP	РЕМКО	ZERO
5874	-	-	478AA


#5873



FINISHES: CA, MB, WP

LEGACY	NGP	PEMKO	ZERO
5873	-	-	-

#5001



FINISHES: MA, BK, WP


OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone

LEGACY	NGP	PEMKO	ZERO
5001	-	-	100A

Example #7383CA-84-TX

#5074




FINISHES: MA, MB, WP

OPTIONS:

FOAM - Foam LIG - Ligature Resistant

LEGACY	NGP	РЕМКО	ZERO
5074	-	-	470AA

#5072




FINISHES: MA, DB, MB, WP

OPTIONS: LIG - Ligature Resistant

LEGACY	NGP	РЕМКО	ZERO
5072	108N	285	270A

#5041




FINISHES: CA, BK

OPTIONS: FL - Fire Label

LEGACY	NGP	РЕМКО	ZERO
5041	122N	375AR	140A

#5274






#5272CA

OPTIONS: FOAM - Foam FX - Intumescent 5274 472AA

#5272

FINISHES: MA, MB, WP






OPTIONS:

FX - Intumescent RS - Ribbon Switch

LEGACY	NGP	РЕМКО	ZERO
5272	-	-	272A

#5041-FX



FINISHES: CA, BK

OPTIONS: FX - Intumescent

LEGACY	NGP	РЕМКО	ZERO
5041-FX	-	-	140FS

How To Order: **Meeting Stiles / Astragals**

Easy Ways To Order

Email Orders@LegacyLLC.com Local: +1 (718) 292-5333

Phone

Toll Free: +1 (888) 383-3330

PART NUMBER & FINISH - LENGTH - OPTIONS 7383

	BOTH DOORS ACTIVE	ONE ACTIVE DOOR
	413PB	714 7483
	789	715 7531
	799	733 7631
	7001	734 7731
	7075	735 7831
	7078	743 7933
#	7178	744 70481
E	7275	763 77128S
PART	7378	774 77319
	7552	795
	7574	7041
	7583	7177S
	7623	7277S
	7823	7383
	7974	NOTES: Both
	72918	Doors Active:
	73918	Order quantity must be 2, one
	74918	for each leaf of
		the opening.



LENGT Please specify to nearest 1/16"

PTIONS 0

Options vary by product. Please check available options listed for each product.

Blank - No Option FL - Fire Label LIG - Ligature Resistant NH - No Holes POL - Polished Bronze

SLC - Strike Lip Cut PSA - Pressure Sensitive Adhesive S-WH - White Silicone TX - Torx Security Screws

SF - Security Fasteners








WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM MADE IN USA PRODUCT CATALOG #24 WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM PRODUCT CATALOG #24

#5041CA-FX

#7623

#72918




FINISHES: CA, BK, WP

OPTIONS:


FL - Fire Label LIG - Ligature Resistant

PSA - Pressure Sensitive Adhesive **SF** - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
74918	115N	308CPK	8194AA

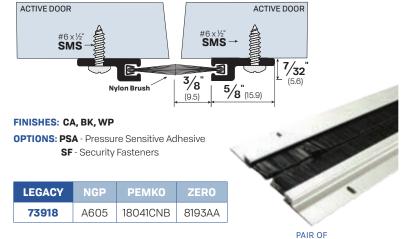

#7623




FINISHES: CA, BK, WP, BR

OPTIONS:

FL - Fire Label LIG - Ligature Resistant POL - Polished Bronze

LEGACY	NGP	РЕМКО	ZERO
7623	137N	319N	326AA

#72918

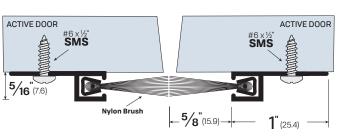



FINISHES: CA, BK, WP

OPTIONS: PSA - Pressure Sensitive Adhesive SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
72918	C607A	18061CNB	8192AA

#73918 #73918

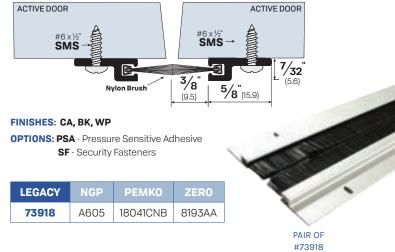

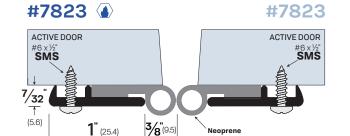


FINISHES: CA, BK, WP, BR

OPTIONS:

FL - Fire Label LIG - Ligature Resistant POL - Polished Bronze

#799 #799




FINISHES: MA, BK, WP

OPTIONS:

LIG - Ligature Resistant S-WH - White Silicone

LEGACY	NGP	РЕМКО	ZERO
799	161N	316AS	99A


#789



FINISHES: MA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
789	161P	-	98A

#7001




OPTIONS:

LIG - Ligature Resistant S-WH - White Silicone

LEGACY	NGP	РЕМКО	ZERO
7001	161S	-	100A

#**7574 (4) (3)**

#7574



FINISHES: CA, BK, WP

OPTIONS:


FL - Fire Label S-WH - White Silicone

LIG - Ligature Resistant

LEGACY NGP PEMKO ZERO 29321-TF 475AA 7574

#7974

#7974




FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
7974	-	-	-

#7583

#7583



FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant

SF - Security Fasteners

	ACY	L L	NGP	PEMKO	ZERO
7583	83		-	-	-

#789

#7175

FINISHES: CA, BK, WP


OPTIONS: FL - Fire Label

LIG - Ligature Resistant

S-WH - White Silicone

LEGACY	NGP	РЕМКО	ZERO
7078	140N	379AR	870AA

#7075 #7075



FINISHES: CA, BK, WP

OPTIONS:


FL - Fire Label LIG - Ligature Resistant

S-WH - White Silicone

LEGACY	NGP	РЕМКО	ZERO
7075	141N	379AR	570AA

LEGACY	NGP	РЕМКО	ZERO
7075	141N	379AR	570AA

#7178 #7178

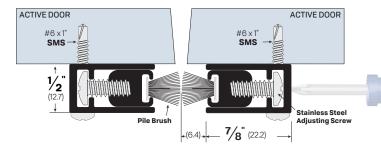


FINISHES: CA, BK, WP

OPTIONS: SF - Security Fasteners

LEGACY	NGP	РЕМКО	ZERO
7178	140P	-	871AA


#7175



FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
7175	-	-	-

#7378

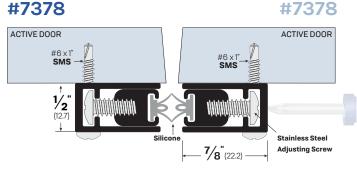


FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone

LEGACY	NGP	РЕМКО	ZERO
7378	140S	351CS	873AA

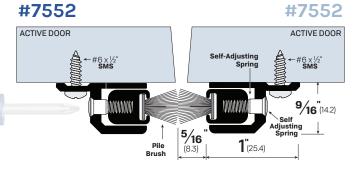


FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant

LEGACY	NGP	РЕМКО	ZERO
7552	140P	351CP	255AA

#763




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant S-BK - Black Silicone

LEGACY	NGP	РЕМКО	ZERO
763	144S	300CP	36AA


#743



FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
743	143P	-	34AA

#733




FINISHES: CA, BK, WP

OPTIONS:

LIG - Ligature Resistant **S-WH** - White Silicone

LEGACY	NGP	PEMKO	ZERO
733	2S	-	33AA

#735




FINISHES: MA

OPTIONS: LIG - Ligature Resistant

LEGACY	NGP	PEMKO	ZERO
735	116N	-	53AA


#795-FX



FINISHES: CA, DB, MB, WP **OPTIONS: FX** - Intumescent

LEGACY	NGP	PEMKO	ZERO
795-FX	-	-	59FS





FINISHES: CA, DB, MB, WP

OPTIONS:


LIG - Ligature Resistant SLC - Strike Lip Cut

NOTES:

- Replacement neoprene lip Part #4383N
- Replacement neoprene bulb Part #4674N

LEGACY	NGP	РЕМКО	ZERO
7383	158N	355	383AA

#7483



FINISHES: CA, BK, WP

OPTIONS:


LIG - Ligature Resistant SLC - Strike Lip Cut

NOTES:

- Replacement sponge neoprene Part #4483SPR
- Replacement neoprene Part #4383N

LEGACY	NGP	РЕМКО	ZERO
7483	-	-	-

#7483-FX



FINISHES: CA, BK, WP


OPTIONS:

FX - Intumescent SLC - Strike Lip Cut

- Intumescent material for Fire/Acoustical applications
- Replacement neoprene Part #4383N

LEGACY	NGP	РЕМКО	ZERO
7483-FX	-	-	383FS

#7041




FINISHES: CA, BK

NOTES:

• Replacement closed cell sponge neoprene - Part #4813SPR

LEGACY	NGP	РЕМКО	ZERO
7041	122N	375CR	140A

#7041-FX




FINISHES: CA, BK

NOTES:

Intumescent material for Fire/Acoustical applications

LEGACY	NGP	РЕМКО	ZERO
7041-FX	-	-	140FS

#7933 4



FINISHES: CA, BK, WP, BR

OPTIONS:

FL - Fire Label

NOTES:

Replacement neoprene - Part #493N

LEGACY	NGP	РЕМКО	ZERO
7933	198N	3151CN	339AA

CA - Clear Anodized Aluminum MA - Mill Aluminum

1 1/4" (32.1)


#70481

FINISHES: CA, MB, WP **NOTES:**

· Replacement closed cell sponge neoprene - Part #5248SPR








FF - LIIE Fane	SF - Security Fasteriers		
LEGACY	NGP	РЕМКО	ZERO
734	1390SP	3572	43SP

#744-LL



Lead Lined Material for X-Ray protection.

• For use on lead lined openings

.032 lead thickness

#744-LL

LEGACY	NGP	РЕМКО	ZERO	
715	158	355CS	-	
714	158P	355CP	41AA	

FINISHES: CA, MB, WP

- Replacement Pile Brush Part #413PB

#715

INACTIVE DOOR




SMS 3/₁₆" ← 11/₁₆" (17.5)→ #714

LEGACY	NGP	PEMKO	ZERO
70481	148N	-	1840A

1 15/₃₂" (37.3) —

#744




FINISHES: MA, MB

NOTES:

· Other widths are available - Specify width

LEGACY	NGP	РЕМКО	ZERO
744	-	-	905A


#774



FINISHES: CA, MB

LEGACY	NGP	РЕМКО	ZERO
774	139A	357	47AA

#714




Example #1019CA-HD-84


Glass Door Gasketing

#7531 #7631 < 5/8"_(16.4)→ - 5/8" (16.4) → PVC 1/2" (12.7)


#7831 #7731



#77319 #423PB




#74918-PSA




FINISHES: CA, BK, WP

LEGACY	NGP	РЕМКО	ZERO
74918-PSA	115N	308CPK	8194AA


#789-PSA



#7177S




#7277S




#77128S





#73918-PSA


ACTIVE DOOR

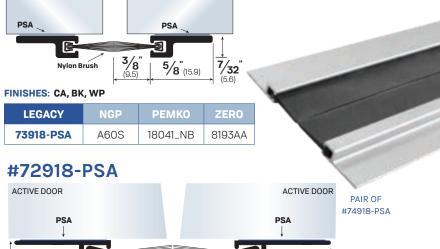

ACTIVE DOOR

Glass Door with #77128S applied.

#423PB-GY



FINISHES: CA, BK, WP

LEGACY	NGP	PEMKO	ZERO
72918-PSA	C607	18061_NB	8192AA

How To Order: **Hinges**

Easy Ways To Order


Email

Orders@LegacyLLC.com

Phone

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

PART NUMBER & FINISH - OPTIONS -




Finishes vary by product. Please check available finishes listed for each product. CA - Clear Anodized Aluminum MA - Mill Aluminum DB - Dark Bronze Anodized Aluminum WP - White Powder Coat SS - Stainless Steel

OPTIONS Options vary by product. Please check available options listed for each product. Blank - No Option HD - Heavy Duty

HT - Hospital Tip **CE** - Concealed Electric **EPT** - Electrical Power Transfer **LH** - Left-Handed

SF - Security Fasteners



#1019CA

For #1019: Please specify to nearest $\frac{1}{16}$. For all Cam Lift and # 1027, Specify each (EA).

APPLICATION

PRODUCT CATALOG #24

161P

LEGACY 789-PSA

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM MADE IN USA

FINISHES: CA, DB **OPTIONS:** HD, EPT, CE, HT, ST, SF

- NOTES: · Grey color
- 16 hinges for standard hinge (approx. double for HD option -- see p.94)
- · Door/ frame reinforcements are not required in most applications
- 5/16" clearance on square edge door, 3/8" clearance on beveled door

Designed for smooth, effortless door swing, our Continuous Door Hinge System integrates two extruded aluminum "geared" segments in a cover channel, with support bearings of longwearing, self-lubricating Delrin™ which absorb shock and distribute weight evenly. The hinge rotates a full 180 degrees. Well suited for both new and retrofit construction, the tamper-proof continuous hinge performs effectively on doors up to nine feet. Constructed from

heavy-gauge aluminum, both models


are offered in a choice of two finishes.





LEGACY	NGP	РЕМКО	ZERO
1019	HD1100	FMSLE-HD1	-


#1027 ELECTRIFIED HINGE




FINISHES: CA, DB

- Power Transfer Technology
- 26-gauge
- 6 wire standard, 8 wire optional
- Tamper-resistant
- Weather-resistant
- 14" Long







FINISHES:

SS - Stainless Steel

OPTIONS:

RH - Right-Handed LH - Left-Handed

- Example Order: #1559SS-RH
- Door Rating (1-1/2 pairs): Up to 200 lbs. Screw Size (Metal Doors): 12-24 x 3/4"
- Lift (180° opening): 3/16"
- Includes all machine screws (24), and 1/2 wood screws (12)
- · All hinges are ANSI template

LEGACY	NGP	РЕМКО	ZERO
1559	-	-	Z955

FINISHES:

SS - Stainless Stee

OPTIONS:

RH - Right-Handed LH - Left-Handed


- Example Order: #1359MB-RH
- Door Rating (1-1/2 pairs): Up to 300 lbs.
- Screw Size (Metal Doors): 12-24 x 3/4"
- Lift (180° opening): 1/4"
- Includes all machine screws (24), and 1/2 wood screws (12)
- · All hinges are ANSI template

LEGACY	NGP	РЕМКО	ZERO
1359	-	-	Z953


rated and other heavy doors up to 900 pounds. Manufactured from high precision stainless steel casting, the cam lift hinge provides a smooth 1/2 inch drop over a rotation of 180 degrees for superior sealing performance. Available for right or left-hand swinging doors. Sold in pairs. Please refer to each individual part for rating details.

Designed for sound-

#517LPT LEGACY POWER TRANSFER

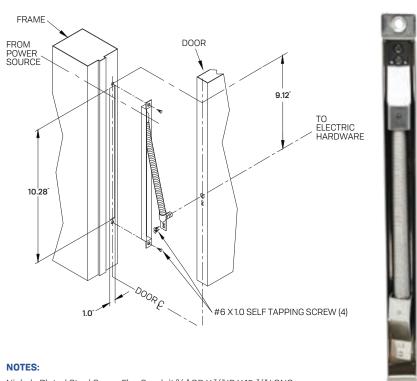


#1026 ELECTRIFIED MINI HINGE





FINISHES: CA, DB


NOTES:

- Power Transfer Technology
- 26-gauge
- 6 wire standard, 8 wire optional Tamper-resistant
- 1.5" Long
- Weather-resistant










#10059

#1059 (4)



FINISHES:

SS - Stainless Steel

OPTIONS:

RH - Right-Handed LH - Left-Handed

- Example Order: #1059SS-LH
- Door Rating (1-1/2 pairs): Up to 500 lbs.
- Screw Size (Metal Doors): 12-24 x 3/4" Lift (180° opening): 5/16'
- Includes all machine screws (24), and 1/2 wood screws (12)
- · All hinges are ANSI template

40-0	LEGACY	NGP	PEMKO	ZERO
1059 - 295	1059	-	-	Z950



LEGACY HINGES

FINISHES:

SS - Stainless Steel

OPTIONS:

RH - Right-Handed **LH** - Left-Handed

- Example Order: #10059SS-LH
- Door Rating (1-1/2 pairs): Up to 900 lbs.
- Screw Size (Metal Doors): 5/16"-18 x 3/4" • Lift (180° opening): 5/16'
- Includes all machine screws (24), and 1/2 wood screws (12)
 - · All hinges are ANSI template

LEGACY	NGP	РЕМКО	ZERO
10059	-	-	Z9500

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM





Nickel - Plated Steel Case - Flex Conduit %6" OD X 3/8" ID X 15-3/8" LONG Electrical wire not provided

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24






#115

FINISHES: MA, MB, WP

NOTES: N (Solid Neoprene) is black.

LEGACY	NGP	РЕМКО	ZERO
115	-	-	51



#115

FINISHES: MA, MB, WP

NOTES: N (Solid Neoprene) is black.

LEGACY	NGP	РЕМКО	ZERO
115	-	-	51



The flexible rubber sheathing in these product protects fingers and hands from being crunched in applications such as schools, child care centers, workplaces and other high-traffic commercial installations. Solid rubber on this product is designed to be durable and to be easily cleaned.

Neoprene rubber resists degradation from sun, ozone and weather while maintaining its strength, flexing, twisting and elongation very well over a wide temperature range while having outstanding physical toughness.



How To Order: Accurate Weatherstriping


Easy Ways To Order

PART NUMBER

Email

& FINISH

Phone Orders@LegacyLLC.com Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

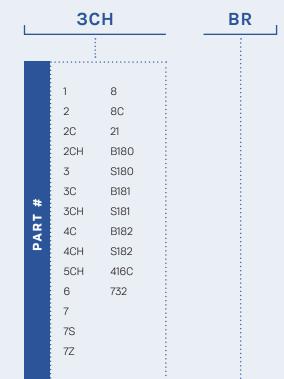

Finishes vary by product. Please check available finishes listed for each product. **BR** - Bronze ss - Stainless Steel **ZN** - Zinc CU - Copper

OPTIONS Options vary by product. Please check available options listed for each product. Blank- Standard Fasteners supplied PSA - Pressure Sensitive Adhesive

LENGTH


Please specify to nearest 1/2"

Example #3CHBR-84

- OPTIONS - LENGTH #3CHBR


Hinge Door Springs

#B180 | #S180 ®




Hinge Door Spring MATERIALS: BR, SS OPTIONS: PSA

#B181 | #S181 (1)



Hinge Door Spring MATERIALS: BR SS OPTIONS: PSA

#B182 | #S182 (1)



Hinge Door Spring MATERIALS: BR, SS OPTIONS: PSA

#7S



Meeting Rail Hook MATERIALS: ZN

#8




Meeting Rail Flat MATERIALS: BR, ZN

#8C



Meeting Rail Flat MATERIALS: BR, ZN

#21



Interlocking Threshold Hook **OPTIONS:** BR, ZN

#416C



Copper Plated Flat Head Nails 7/8" #16 MATERIALS: BR, ZN, CU


Our Legacy is Quality & Performance. Our Focus is Customer Service

#1




Plain Rib Strip 1" Base **MATERIALS: BR, ZN**

#2CH




Side Strip 1-3/8" Base MATERIALS: BR, ZN

#3CH




Side Strip 1-5/8" Base MATERIALS: BR

#5CH




Side Strip 2-1/8" Base MATERIALS: BR, ZN

#2




Plain Rib Strip 1-3/8" Base **MATERIALS: ZN**

#3




Plain Rib Strip 1-5/8" Base MATERIALS: ZN

#4C




Plain Rib Strip 1-7/8" Base MATERIALS: BR

#6




Plain Rib Strip 2-1/8" Base MATERIALS: BR, ZN

#2C




Side Strip 1-3/8" Base MATERIALS: BR

#3C



Plain Rib Strip 1-5/8" Base MATERIALS: BR, ZN

#4CH



Plain Rib Strip 1-3/4" Base MATERIALS: BR, ZN



Meeting Rail Hook MATERIALS: BR, ZN



Flood Barriers

... protect openings and help safeguard building contents from floodwaters

Building on years of experience providing vital flood zone protection for doorways, Legacy now offers reliable, cost-effective flood barrier systems for virtually every building opening exposed to potential high-water flooding. Installing Legacy flood barriers can help satisfy National Flood Insurance Program (NFIP) requirements for coverage in designated flood zones, along with providing invaluable peace of mind to building owners hoping to minimize flood damages.

Legacy flood barrier panels are engineered for easy installation into pre-mounted aluminum brackets attached to frames or adjacent walls. When high water threatens, simply drop the barrier panel into the mounting channels and hand tighten the screw. Panels can be removed just as easily for storage when not in use. Closed cell sponge neoprene lines the bottom and sides of openings to ensure a watertight seal, as well as compensate for any gaps at door thresholds. These seals feature an innovative "three-finger" rubber profile for improved compression and better seals compared with conventional U-channel design.

Constructed from marine-grade aluminum, the removable flood barrier panels can be built to any specified height and are also stackable using watertight bar clamps. Milled Easy-Lift handles are another recent design enhancement. Interlocking posts, including outer sleeves for ground support, are supplied for specified opening widths greater than 48 inches, which translates to virtually no practical limit on the width of protected openings or spans.

Suitable for both residential and commercial applications, Legacy flood barriers comply with standards of the Federal Emergency Management Agency (FEMA) and Federal Insurance Administration (FIA) for use on doors in flood-prone areas. They are also ideal for houses with adjacent wetlands or in high-rainfall areas.



Specify Legacy Flood Barriers for:

- Entranceways and garage doors
- Sub-level and standard windows
- Exterior louvers or fireplaces
- Power-supply enclosures

LEGACY	5127	5027	5128	5129
NGP	FS	FS	-	-
РЕМКО	-	-	-	-
ZERO	-	2070A	-	_



Product Speci	fications					
Panel 5052 marine aluminum alloy						
Frames	Channel 6062 alloy T5-T6, with 10-32 stainless steel Allen head tightening screws every 8" on center.					
Seal	Solid Neoprene Seal					
Hardware	#10 x 1-½" FHPH with plastic expansion tube anchors. Snap covers for safety provided for the top of the channels and for the mounting holes.					
Installation	Can be installed on hollow metal, aluminum or wood frames; and on concrete, brick or metal surfaces.					
Floor Surface	We recommend our #319 Threshold ($1/4$ " $ imes$ 2" beveled aluminum plate)					


How To Order: Flood Barriers ...

Example #5027MA-30X60

Easy Ways To Order

Email Orders@LegacyLLC.com **Phone**

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330



	2275	5127
#	5021	5125
H	5027	5128
PART	5028	5129
<u>a</u>	5029	22070CH
	5121	22070-OS
	• • • • • • • • • • • • • • • • • • • •	

All Flood Shields are 5052 marine aluminum alloy. Finishes are available for mounting brackets only. MA - Mill Aluminum

Flood barrier panels can be built to any custom height, subject only to practical constraints on the ease of fitting into and removing from mounting brackets. Specify to nearest 1". Panels specified for stacking are supplied with

WIDT

Flood barriers can be built to any custom width or span. Specify to nearest 1/8". Interlocking posts with ground support are required and supplied for every 48" of installed flood barrier. Tableau ± 1/8"

Ordering Note

Because of the range of available options and the precision needed for efficient installations, Flood Barriers are typically specified in consultation with our Engineering Department.

Call our engineering department to discuss.

LEGACY ENGINEERING

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330




Custom Width"



#5027MA mounted to the inside of the door frame.


#5127 MOUNTED TO OUTSIDE OF FRAME

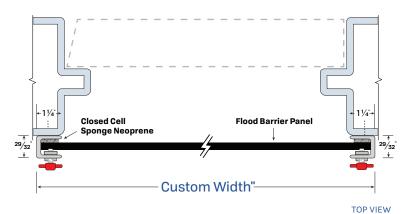



#5127MA mounted to the outside of the door frame.




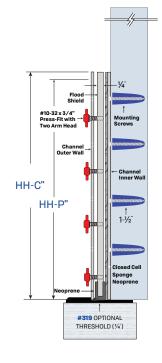

FRONTVIEW SIDE VIEW

Single Flood Barrier for Windows, Louvers & Fireplaces (Up to 48")


#5028 MOUNTED TO INSIDE OF FRAME

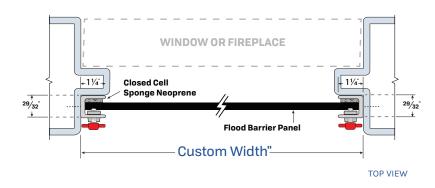



#5128MA mounted to a basement window

MOUNTED TO OUTSIDE OF FRAME

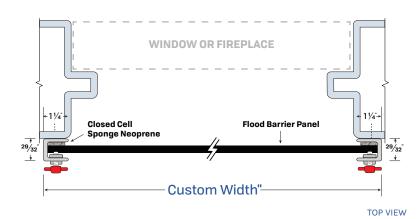






FRONTVIEW

SIDE VIEW


TOP VIEW

FINISHES: CA, BK

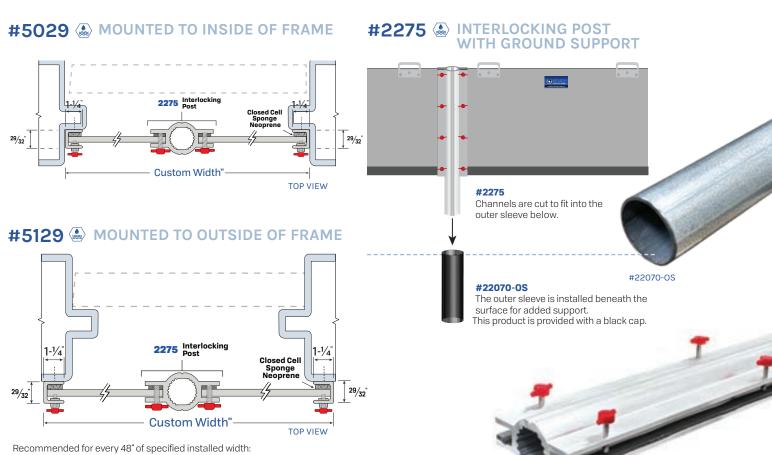

• #2275 Interlocking Post with

#22070-0S Outer Sleeve









#5129MA mounted to front of hotel entrance.

#5029MA mounted to the inside of garage door frame.

Flood Barrier (Individual Components)

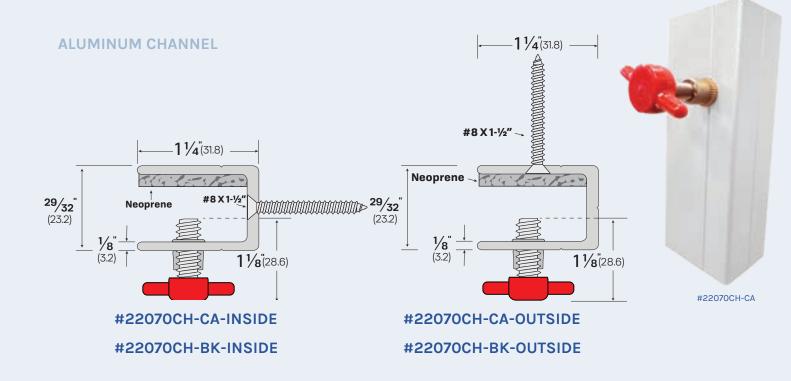

#5021 STACKABLE FLOOD BARRIER

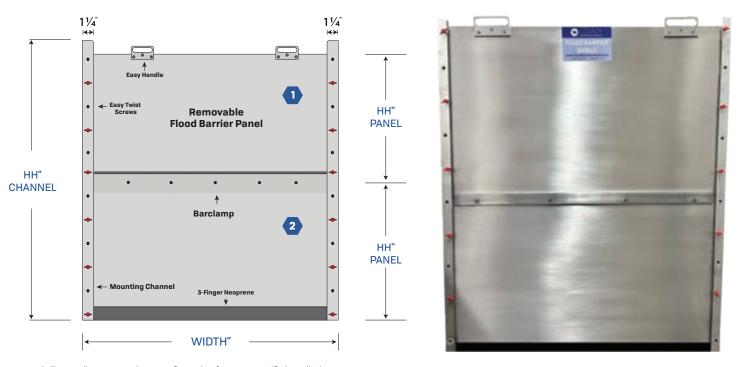

• Call us to discuss your best configuration for your specific installation.

PRODUCT CATALOG #24

FINISHES: MA

MADE IN USA

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

MADE IN USA

WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM



Acoustical Systems (1)



Experience and precision engineering are paramount in designing high-performance acoustical door assemblies, and nobody scores higher than Legacy on both counts. We extend that expertise to sound door manufacturers interested in collaborating to achieve industry-leading results.

Legacy's OEM program assists manufacturers in designing and building acoustical doors to achieve specific STC ratings. There are three distinct, integrated components to the services we provide:

- Advice on design and construction for your STCrated doors,
- Consultation on integrating best-value sound-control gasketing to optimize costs and performance, and
- Collaborating on testing the assembly in the lab to achieve published STC ratings.


The first step is understanding your goals and the resources we can provide to help. Call our engineering department to discuss.


LEGACY ENGINEERING


Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

System	Head & Jamb	Door Bottom	Threshold	Door Rating	STC Rating
6049STC	5077, B182, 5881S	7763	3465	50	49
6148STC	5077, B182,50517S	7763	3665	49	48
6048STC	5077, B182, 5881S, 52408S	7763	3465	50	48
6047STC	5077, B182	7763	3665	49	47
6046STC	5077, 50517S	7763	3665	49	46
6042STC	5077	7763	-	50	42
6142STC	5574	-	3465	50	42
6037STC	5584, 50519S	7553	3465	37	37
6136STC	5584, 5883S	7553, 793	3465	37	36
6236STC	50519S	7153	-	37	36


This representative list shows published STC results for acoustical door assemblies and configurations designed and tested through collaborations between Legacy and OEM partners.

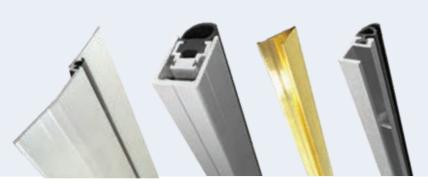

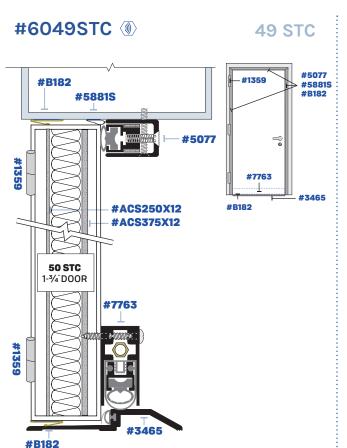


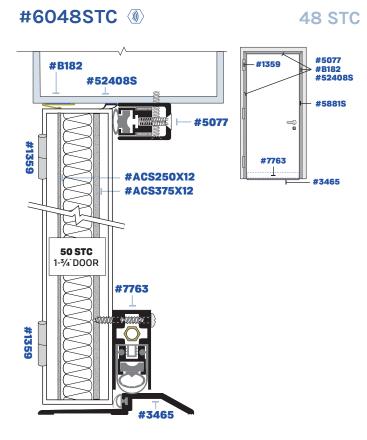





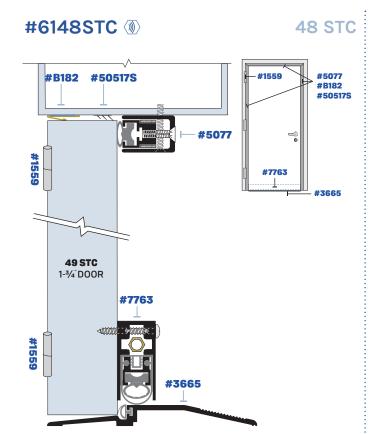

WP - White Powder Coa

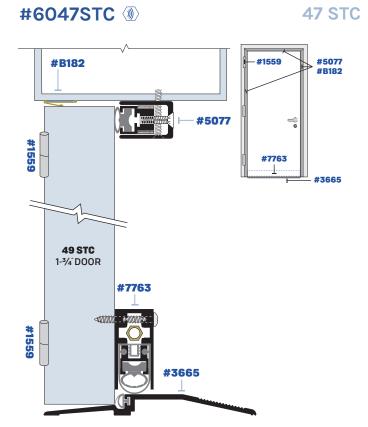

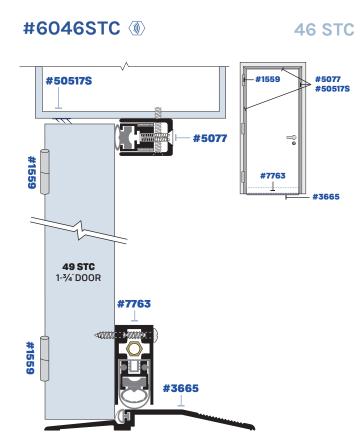

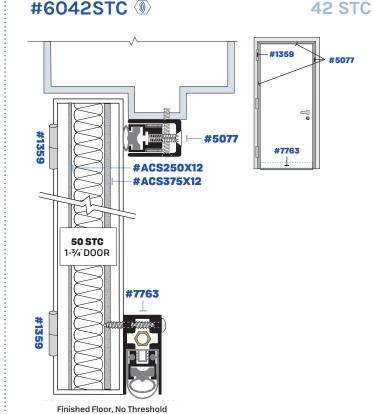

PRODUCT CATALOG #24


WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM


MADE IN USA


PRODUCT CATALOG #24


WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM


MADE IN USA

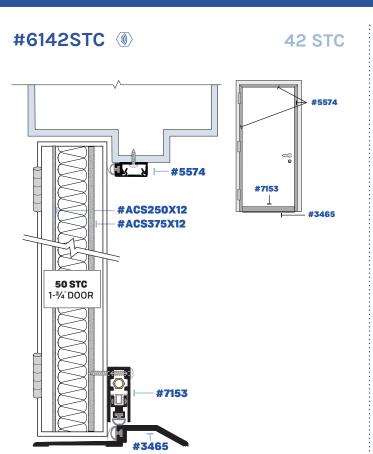


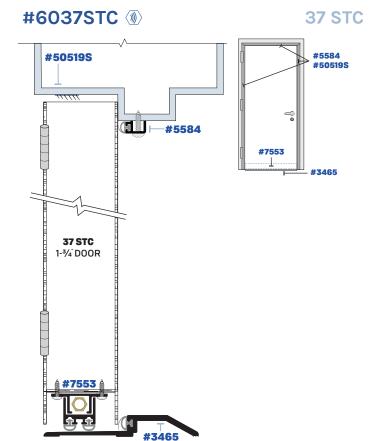

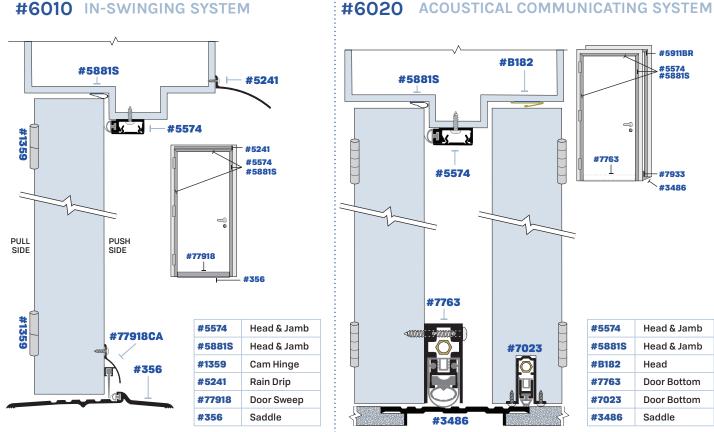


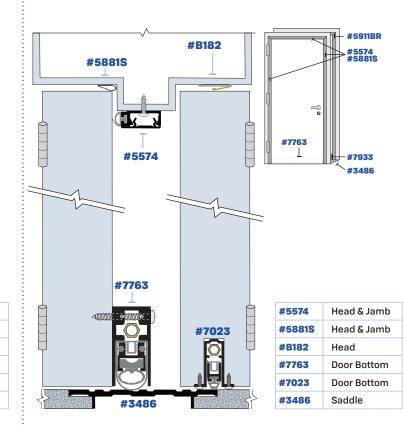

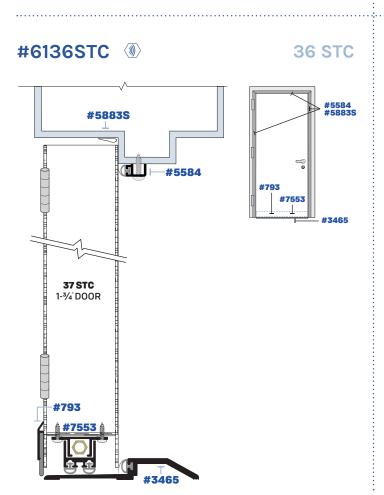


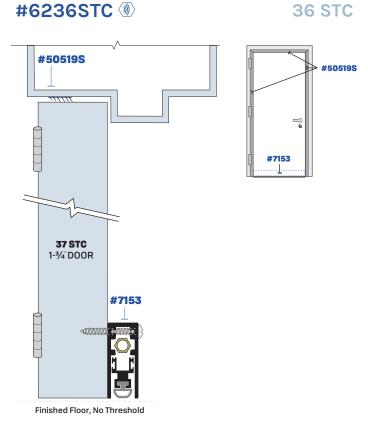


#6011 DOUBLE EGRESS PAIR OF DOORS SYSTEM (HOSPITAL & SCHOOLS)

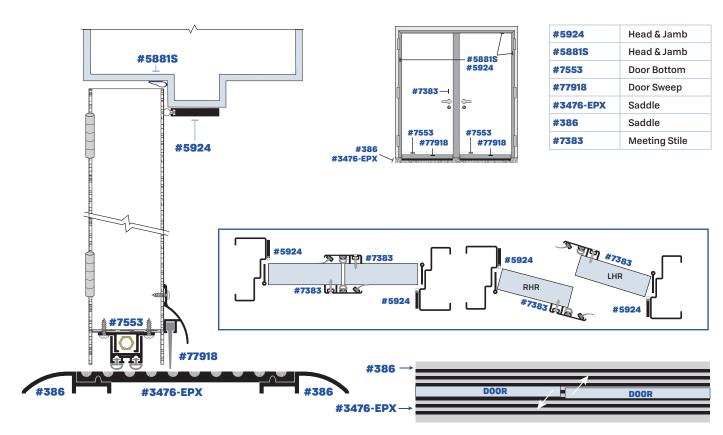

AUTOMATIC DOOR BOTTOM ON STAND-BY #64EA

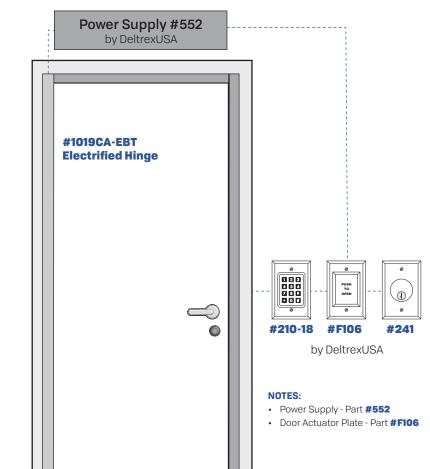

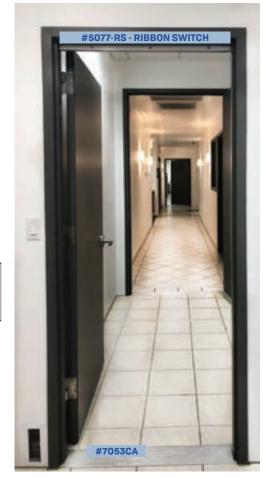


#64 - ADB ON STANDBY



#7053CA

Electrified door bottoms provide a practical solution for doorways to areas that need regular air flow but also require the door to seal during emergencies, such as a fire. Using a switch or push plate provided by Deltrex USA, the door bottom can be activated during such situations to provide a complete, airtight seal.

PIVOT DOOR APPLICATIONS

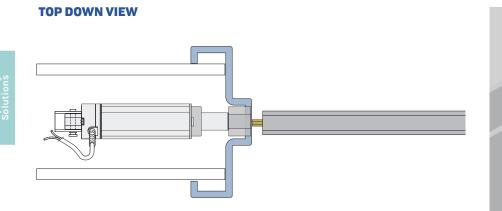

Nitrile for Clean Rooms


Nitrile rubber is a versatile addition to Legacy's arsenal of formulations for practical sealing solutions. Among its many benefits, nitrile rubber provides good compression set and tensile strength, and is resistant to heat, abrasion and moisture. Its resistance to gas permeability also makes it corrosion-resistant to a long list of chemicals.

Specifying nitrile rubber components can be useful for protecting sealing systems from extreme exposures to corrosive chemicals in medical and industrial applications.


Specify NIT option to order nitrile rubber for these components.

#5574-NIT	Head & Jamb
#5584-NIT Head & Jamb	
#7352-NIT	Door Sweep
#7351-NIT	Door Sweep
#7111-NIT	Door Sweep

#6050NIT

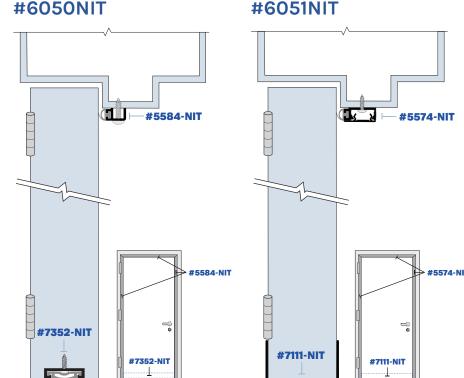


#6090EMI EMI/ RFI SEALING SYSTEMS

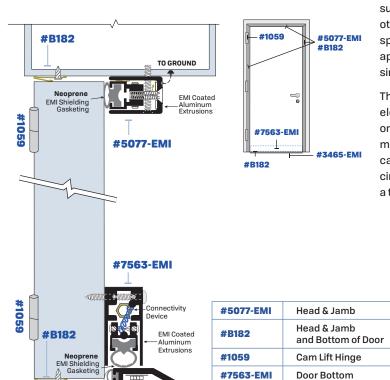

System #6090EMI is one solution available from Legacy for blocking electromagnetic and radio frequency interference in applications such as laboratories, hospitals, brokerage houses, embassies and other facilities using sensitive electronic equipment. We can provide specification assistance for configuring other systems for specific applications. Legacy also offers OEM consultation for developing similar systems.

The technology common to these systems provides uninterrupted electrical current to block EMI/RFI transmission. An iridate coating on the aluminum housings in Legacy EMI/ RFI systems ensures maximum conductivity around the door gasketing, while solid carbon-filled neoprene rubber gaskets complete the electrical circuit. The #6090EMI system has adjustable features to help ensure a tight seal.



#5077CA-EMI

PRODUCT CATALOG #24

WWW.LEGACYLLC.COM | PH: (718) 292-5333 |

CONTACT@LEGACYLLC.COM

MADE IN USA

PRODUCT CATALOG #24

#3465-EMI


WWW.LEGACYLLC.COM | PH: (718) 292-5333 | CONTACT@LEGACYLLC.COM

#3465-EMI

Grounded Bronze Threshold

MADE IN USA

Legacy's patent pending automatic door bottom for the sliding door application has a unique low force activation mechanism which allows for more successful operations.







Even drop for sliding doors

#6040 POCKET LATCH SYSTEM


Legacy's patent pending automatic door bottom for the pocket latch application has a unique low force activation mechanism which allows for more successful operations.

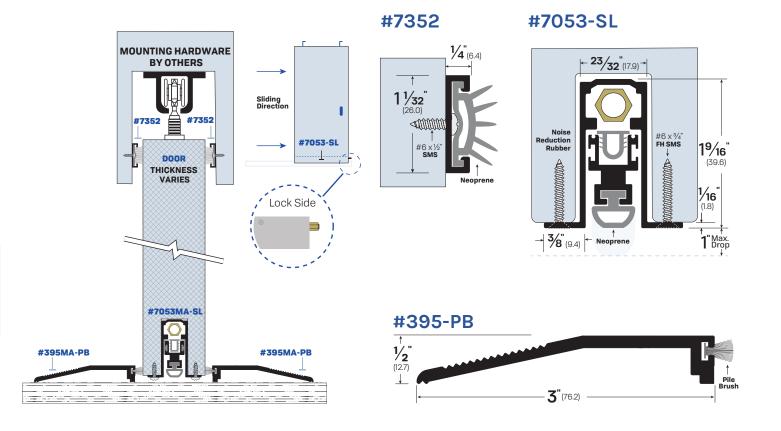

#50888 ACOUSTICAL VISION (1-3/4" DOORS)

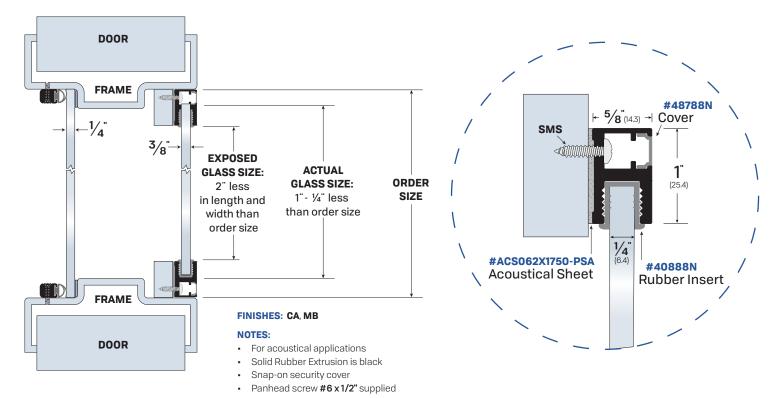

#6384 **ACOUSTICAL VISION (2-1/8" DOORS OR GREATER)**

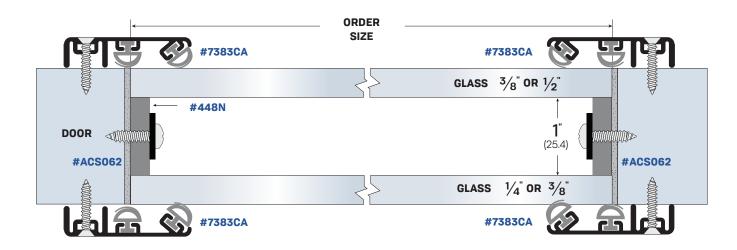

FINISHES: CA, MB

- · Please specify thickness of the door when ordering.
- Acoustical Composite Sheet (ACS) by Legacy provides sound absorption between glass plates.
- Glass plates with two different thicknesses required to minimize sound transmission.
- Sound control performance on this opening may achieve up to 44STC.
- Glass to be supplied by other manufacturers.
- #7383 corners are standard mitered cut.

Acoustical Composite Sheet (ACS)

Acoustical Composite Sheet (ACS) is proprietary, special-purpose rubber material manufactured in sheet form - developed primarily for sound door OEM use as acoustical core to improve STC ratings. This lead-free, densely filled polyurethane rubber effectively blocks sound transmission while minimizing sound vibrations in the door itself for superior STC performance, without the weight and cost of conventional solid-lead acoustical linings.

Call our engineering department to discuss possible applications for your sound door program.

LEGACY ENGINEERING


Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

Its non-toxic, inert properties also make ACS suitable for a range of additional OEM applications, which we are available to discuss for possible collaboration.

MATERIALS / SPECIFICATIONS:

- · Densely filled, solid pigmented, polyurethane rubber noise barrier providing both soundabsorbing and sound-deadening properties.
- Uses 100% natural fiber found in volcanic rocks.
- Non-toxic, inert and non-carcinogenic no toxic reactions with air or water.
- Non-combustible and non-explosive with a high melting point and low smoke index safe for use in most fire-rated applications.
- Biodegradable with a low carbon footprint.
- · Frequently used in CLMD (constrained layer mass damping) applications, such as sound walls.
- Mold-resistant and mildew-resistant, and washable when used in exposed areas, such as restaurants, public spaces, temporary applications, hanging baffles, etc.

_	⅓"Thick	⅓"Thick
	#ACS250X12	#ACS125X12
STC Rating	28	24
Deficiencies	23	32
OITC Rating	24	19



Sound Transmission Coefficients

Frequency	STC - 1/4"	STC - 1/8"
125 Hz	18 db	14 db
250 Hz	20 db	15 db
500 Hz	25 db	20 db
1000 Hz	28 db	23 db
2000 Hz	32 db	37 db
4000 Hz	37 db	33 db
Sound Transmission Class:	28	24

Physical Properties		#ACS250X12	#ACS125X12
Tensile Strength:	(Per ASTM D412-64)	375 lb/sq. in.	105.32 lb./sq. in.
Elongation:	(Per ASTM D412-64)	113.2%	160%
Tear Strength:	(Per ASTM D1004-66)	6.09 lb./in.	6.09 lb./in.
Weight/ft.2:		1.337 lb./sq. ft.	0.7106 lb./sq.ft.
Thickness:		Approximately 0.250"	Approximately 0.125"
Cold Crack:	(32°F)	No crack when bent over 1" mandrel	No crack when bent over 1" mandrel
Flammability:		Passes MVSS #302	Passes MVSS #302
		UL94-SE "0"	UL94-SE "0"
		Classified as SE (Self Extinguishing)	Classified as SE (Self Extinguishing)
		No burn rate	No burn rate
Recommended Servi	ce Temperature:	40°F - 140°F	40°F - 140°F
Notes:		May be doubled for improved isolation	May be doubled for improved isolation
		Resistant to oil, grease, & solvent	Resistant to oil, grease, & solvent

These results apply only to our test sample. Legacy will assist in developing samples and protocols for testing other materials on request.

Fire Protection Material for Special Order and OEM Applications

NOTES:

- · Used in fire applications.
- · Available in custom length, width and thickness.
- · Proprietary formulation -- environmentally safe, minimal carbon footprint
- Standard black color. Red available as option—specify RD.
- Optional Laminated to wood, aluminum, steel, or other solid materials.

Call our Engineering Department to discuss your needs and available options.

LEGACY ENGINEERING

Local: +1 (718) 292-5333

Toll Free: +1 (888) 383-3330

LEGACY	14212	14219	14225	14244	14312	14319	14325	24625	24650
ZERO	4062500	4062750	40621000	40621750	412500	4125750	41251000	42501000	-


Type #3 (30X Expansion)

#13212

#13219




#13225



#13244

1/16"	<u></u>	CY75712115174	17/12 PY 15/
(1.9)	î	1 3/4" (44.5)	└-PSA

#13312




#13325



Type #4 (120X Expansion)

#14212



#14219




#14225



#14244



#14312



#14319






CUSTOM

MADE TO

ORDER ANY

LENGTH AND


COLOR













#14325








#7463CA-FX

#24650



MADE IN USA







RubberLLC.com

415 Concord AVE.

Email

Contact@LegacyLLC.com

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

Legacy Rubber is your one source for top-quality rubber extrusions in the shapes, colors, and lengths you need. We can help determine the best rubber or evaluate custom compounds for your application.

Legacy Rubber is located in the heart of the nation's primary rubber manufacturing region, Middlefield, Ohio. We produce highest-quality materials in both standard and customized formulations, and can supply virtually any kind of rubber, tinted to the color you need.

Available in both dense and sponge compounds, standard materials include: EPDM · natural rubber · nitrile · polyisoprene · SBR · silicone · neoprene.

Legacy rubber products are solving problems across a broad spectrum of industries, including:


- Agriculture
- Equipment
- Automotive Food
- Aviation


Construction

- HVAC Industrial
- Marine
 - Pharmaceutical
 - Renewable Energy
 - Window & Door

UNIQUE BENEFITS FOR OUR OEM PARTNERS

- Our state-of-the art equipment includes digital controls that maintain very close tolerances for optimizing conformance of custom-made dies to their blueprints, along with providing consistent, accurate extrusions.
- Extrusion capabilities include: standard and custom shapes and profiles, seals, weatherstripping and rubber straps.
- Our continuous cure technology permits long-run extrusions of virtually any length—for example, O-rings in continuous stock to lengths of 1,000 feet and longer.
- 100% U.S. sourcing eliminates the variables of international supply and deliveries. On-time delivery is standard at Legacy Rubber.



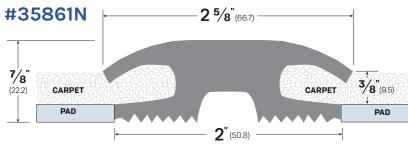

MATERIAL: N - Neoprene

SBR: Styrene-butadiene Rubber

A synthetic rubber with good abrasion resistance and aging stability. Car tires are made of SBR.





The machine line in our Middlefield, Ohio Facility.






LEGACY	NGP	РЕМКО	ZERO
3224N	-	-	-
35861N	401	-	1685N

Materials











Aluminum (CA) (MA) (BK) (DB) (GD)

Aluminum shapes by Legacy are extruded in a mill finish. Parts are available in clear anodized (204R1 clear), mill finish, black anodized, dark bronze anodized, and gold anodized. Legacy uses a 6063 alloy with a hardness between T5 and T6.

Bronze (BR)

Architectural Bronze shapes by Legacy are extruded in brass alloy #380. This alloy has the following breakdown: 57.5% copper, 41% zinc, 1.3% lead, and 0.2% aluminum. Legacy's bronze products are provided in a standard mill finish. However, Legacy also offers a variety of bronze finish options such as polishing and oil-rubbing. Over time, the gold color bronze that Legacy provides will oxidize to a dark bronze. Legacy also has roll-formed spring bronze. This product is about 90% copper and 10% zinc. Most commonly used in part 5911BR.

Neoprene (N) (SPR)

Legacy Manufacturing extrudes our own neoprene at our Ohio facility. Neoprene is provided in two different forms: Closed-Cell Neoprene (N) and Sponge Rubber (SPR). Because of the chemical composition of neoprene, the product can only be extruded in a black color. The primary chemical that limits the color of neoprene is chlorine, which is required in Legacy's products for fire-rating purposes. Technical data is provided on request. Neoprene generally has a tensile strength up to 3000 PSI, with a hardness range is between 40-70 (Shore A), and provides excellent adhesion to both aluminum and bronze. Neoprene is superior to vinyl for its tear resistance and resilience under temperature changes.

Silicone (S)

Also produced at our Ohio facility, Legacy's silicone can be extruded in a variety of colors including white, blue, green, grey, brown, black, and clear. Silicone has excellent resistance to oxidation, heat, cold, and water absorption. Silicone should not be used in areas that have concentrated exposure to chemicals and acids.

Polypropylene Brush (PB)

Pile Brush inserts are used in a variety of applications and mostly for interior openings. The brush consists a polypropylene fiber that is mechanically fastened to a plastic backing. Custom brushes are also available depending on customer specifications. Fibers are generally flexible.

Fasteners (SMS) (FA)

Standard threaded-to-the-head sheet metal screws are supplied for all head and jamb gasketing material. Legacy has a variety of options for the screw head including Phillips, slotted, truss, pan, and flat head. Flat head screws are generally provided for threshold applications. We also offer a wide range of anchors that can be used with these screws. (See page 28 for available anchors.)



CA - Clear Anodized Aluminum

MA - Mill Aluminum

DB - Dark Bronze Anodized Aluminum

BR - Architectural Bronze

MB - Matte Black Powder Coat

BK - Black Anodized Aluminum

WP - White Powder Coat

ORB - Oil Rubbed Bronze

SP - Gray Steel Prime

SS - Stainless Steel

GD - Gold Anodized Aluminum

POL - Polished Bronze

Aluminum

Clear Anodized	ANSI/BHMA 628	US28	CA
Mill Finish	ANSI/BHMA 719	US27	MA
Black Anodized	-	-	BK
Dark Bronze Anodized	-	-	DB
Gold Anodized	-	-	GB
Powder-Coated Colors	SEE ABOVE	-	-

Architectural Bronze

Satin Finish	ANSI/BHMA 728	US4	BR
Oil-Rubbed	ANSI/BHMA 722	US10B	ORB
Polished	ANSI/BHMA 721	US3	POL

Stainless Steel

Mill Finish	-	-	SS
Brushed (#4)	ANSI/BHMA 630	US32D	SS-Brushed
Polished	ANSI/BHMA 629	US32	SS-POL

Product Symbols



())) Acoustic









Regulatory Standards

Fire Rated



UL10B Standard for Fire Tests of Door Assemblies

UL10C Standard for Positive Pressure Fire Test of Doors

UBC 43-2 Fire Test of Door Assemblies

UBC 7-2-97 PART I Fire Test Standard for Swinging Fire Doors

CAN / ULC S104

ASTM E152 Method of Fire Test of Door Assemblies

ASTM E2074 Standard Test Method for Fire Tests of Door Assemblies, including Positive Pressure Testing of Side Hinged and Pivoted Swinging Door Assemblies

IBC 2009 International Building Code

NFPA 80 Standard for Fire Doors and Fire Windows

NFPA 101 Life Safety Code

NFPA 105 Recommended Practice for the Installation of Smoke and Draft Control Door Assemblies

NFPA 252 Standard Method of Fire Tests of Door Assemblies SDI 118 Basic Fire Door Requirements

FEMA Compliant



FEMA Technical Bulletin 3-93 Non-Residential Flood-proofing

FEMA Flood-proofing Non-Residential Structures #102

FEMA P-259 Engineering Design and Principles

Smoke



UL1784 Standard for Air Leakage Tests of Door Assemblies

IBC 2009 International Building Code

UBC 7-2-97 PART II Method of Smoke and Draft Control Tests of Door Assemblies

Acoustic



Acoustical ratings are achieved by OEM testing using specific door assembly configurations. See our acoustical section located on pages 67 for more detailed STC ratings.

ADA Accessible



ADAAG-1998

ICC/ANSI A117.1-1998 Standard for Accessible and Usable Buildings and Facilities

IBC 2009 International Building Code

Non-Slip Surface



ASTM F-609 Standard for Safety for Slip Resistance of Floor Surface

MIL-D 23003 A Deck Covering Compound, Non-Slip, Rollable

UL 410 Standard for Safety for Slip Resistance of Floor Surface

Electromagnetic / Radio Frequency Interference



EMI testing is achieved by testing against standards of MIL-STD-285 and NSA 73-2A. We are happy to work directly with you and your opening to achieve positive results.

MIL-STD-285 Attenuation measurement for enclosures, electromagnetic shielding NSA 73-2A Performed for electric field attenuation over the frequency range 10 MHz to 1 GHz



While we are recognized and applauded for our unique capabilities and appetite for customization, it is Legacy's unequaled range of standard features and options that puts the power of ultimate flexibility in the hands of the specifier. The options listed in this catalog are explained in more detail below.

ACF	Aluminum Composite Filler for Thresholds	Strengthens and reinforces thresholds to prevent bending or crushing under high-traffic and heavyweight use in schools, industrial and manufacturing plants, and other high-stress applications.
AIR	Air Flow for Door Sweeps	Double rows of notched and staggered neoprene seals allow free flow of air while still blocking light at the bottom of the door.
Blank	No option specified	Standard features apply (if any).
CE	Concealed Electric for Hinges	26-gauge wires for buzzers, alarms and other electrified hardware mounted in a removable hinge section for easy access if needed. Specify up to 12 wires.
EA	Electrical Actuator for Automatic Door Bottoms	Allows electronic activation of door opening hardware (i.e., pushbutton, key pad or card reader) using a mortised motor. Motor and casing are provided for wiring by installer. Not available elsewhere.
EMI/RFI	Electromagnetic/ Radio Frequency Interference Blocking	An iridate coating on aluminum housings and solid carbon-filled neoprene rubber gaskets ensure maximum electrical conductivity for blocking both electromagnetic and radio frequency interference in applications such as laboratories, hospitals, brokerage houses, embassies and other facilities using sensitive electronic equipment. (See p.85 for details.)
EP	Extended Plunger for Automatic Door Bottoms	50 mm brass hex nut (versus standard 30 mm) helps compensate for excessive gap between the door and frame.
ЕРТ	Electrical Power Transfer Cut-Out for Hinges	Notches cut out on both sides of the continuous hinge accommodate installation of a power transfer unit without interfering with hinge operation. Specify handing and cut-out dimensions when ordering.
EPX	Epoxy Abrasive for Thresholds	Non-slip abrasive epoxy is chemically applied to the grooves of the threshold for improved strength and grip.
FL	Fire Label	Available for products with published fire ratings. When properly applied, fire labels are visible and legible to meet inspection requirements.
FOAM	Foam for Perimeter Seals	Acoustical foam insert for additional sound-blocking density.
FX	Intumescent	Where offered, this option allows adding Legacy's proprietary intumescent material to products where it is not already integrated as standard design. Useful for fire applications to ensure effective sealing of all gaps.
HD	Heavy Duty for Hinges	Specify for high-traffic and heavy doors up to 475 lbs. Hinge cut-out differs from standard to support roughly double the usual number of bearings. Call our Engineering Department for guidance on your specific application. (For example, 83" door height/ 32 bearings supplied; 95"/ 36 bearings; 107"/ 42 bearings. Other heights can also be accommodated.)
нт	Hospital Tip for Hinges	Sloped barrel end on hinge top simplifies cleaning and helps prevent insertion of foreign items that might cause harm. Ideal for security doorways in prisons; hospitals and mental health facilities; and clean rooms.
LA	Lead Anchor Fastener	Lead anchors for use with standard #10 screws
LIG	Ligature Resistant	Notching silicone or neoprene seal at 8-inch intervals ensures that gasketing will break into pieces if removed from extrusions or aluminum housing for any reason. Common applications are prisons and psychiatric facilities.
LL	Lead Lined	Integrates lead into parts for lead-lined openings, primarily used for x-ray protection.

LS	Light Spring for Automatic Door Bottoms	Allows lower operating force to for compliance with ADA requirements when integrated with appropriate head and jamb components.
NH	No Holes	Specify to omit standard mounting holes.
NIT	Nitrile Extrusion	Extruded rubber in nitrile formulation for protection from corrosive chemical exposures in medical and industrial applications. (See p.85 for details.)
ORB	Oil-Rubbed Bronze	Specify for standard architectural bronze components to be provided with BHMA US10b finish.
РВ-ВК	Black Pile Brush	
PB-GY	Grey Pile Brush	
PB-WH	White Pile Brush	
PEPX	Photoluminescent Epoxy Abrasive for Thresholds	Specify for compliance with NYC Building Code Standard RS 6-1/1A and IBC 2000 requirements for photoluminescent stairwell and exit path markings. Threshold grooves are filled with a proprietary photoluminescent epoxy that emits luminescence after charging by exposure to ambient light.
POL	Polished Bronze	Specify for standard architectural bronze components to be provided with BHMA US3 finish.
PSA	Pressure Sensitive Adhesive	Industry-leading 3M tape is supplied for highest-quality pressure-sensitive adhesive.
PULL	Pull for Automatic Door Bottoms	Removable end cap allows removing the door bottom insert for cleaning or repair while housing remains mounted to the in-place door. Ideal for hospitals, schools, hotels and other applications with high standards for cleanliness.
PV	Pivot Doors for Automatic Door Bottoms	The larger gap between door edge and frame in pivot door requires a different mechanism and extended brass hex nut for efficient seal drop.
RS	Ribbon Switch for Perimeter Seals	Mounted to the inside of gasketing to allow integration of switch-operated access-control hardware.
RUB	Rubber Grip for Thresholds	Typically used for interior applications. In place of conventional rubber inserts, our unique process chemically applies non-slip rubber to threshold grooves for enhanced grip and strength.
SF	Security Fasteners	Tamperproof Torx screws are provided.
SL	Sliding Doors for Automatic Door Bottoms	In place of a conventional spring for latching, a light spring is included for easier activation when the sliding door is closed. Automatic door bottoms specified with this option drop evenly against the floor.
SLC	Strike Lip Cut for Overlapping Astragals	For pairs of doors with one active and one inactive leaf. A cutout in the astragal accommodates a typical strike with exposed lip in the overlapping astragal.
ST	School Tip for Hinges	To prevent insertion of foreign objects that might impede hinge operation or damage gears, bearing plugs are mounted flush with the top and bottom openings of the hinge.
S-WH	White Silicone	Specify white silicone to replace standard black silicone.
TD	Top Door Installation for Automatic Door Bottoms	Suitable for maximum 3/8" clearances, mounting this hardware at the top of the door is a useful option for closing gaps for mortised sound control or other applications while maintaining the aesthetics of no exposed hardware.





Part #	Page #	Part #
1	70,73	\$180
1S	48	B181
2	73	S181
2C	73	B182
2CH	73	S182
2INCHNUT	16	ACS250
2S	48	313
		-
3	73	342
3C	73	348N
3CH	70,73	352
3S	48	356
4C	73	ACS375
4CH	73	386
4S	48	395
5CH	73	398
5S	48	399N
6	73	413PB
6S	48	416C
7	73	423PB
7S	48,72	443PB
7Z	70	448N
8	72	501
8C	72	513
8FC	40	517LPT
8S5	39	523
8S11	39	545DP
8S13	39	589
8S14	39	599
8S16	39	711
8T1	39	714
8T2	39	715
8T2E	39	718
8T3	39	725MA
8T4	39	727MA
8T5	39	732
9T1	39	733
9T2	39	734
21	72	735
FA21	28	739
FA22	28	743
FA23	28	744
FA24	28,29	749EC
FA26	28	752
42PB	49	759
64EA	84	763
ACS062	87	769
ACS125	88	774
115	70	779
117	70	789
B180	72	793

Part #	Page #
795	63
799	17,61
812AA	40
813	42
813G	42
824	41
826	41
828	40
832	40
832L	40
838	40
841	41
842	41
865	40
928L	40
934C	41
1019	3,67,68,70
1026	5,07,00,70
1020	68
1059	69,85
1359	69,80,81,83
1559	69,81
2275	78
3006EJ	
3031	30
3106EJ	
3143	34
3144	34
3145 3224N	34
	90
3232	37
3276	30,43
3291	35
3292	35,42
3325	35
3332	37
3376	27,29,30,43
3425	35
3432	37
3441	33
3445	3,31
3456	28,32
3461	32,45
3465	2,27,29,36, 42,80,82,85
3476	29,30,43,83
3486	34
3501	30
3512	38,42

Part #	Page #
3532	37
3541	33
3545	31,42
3556	32
3561	45
3565	36
3571	41
3574	29,34
3576	29,30,43
3601	29,30
3612	38
3616	33
3632	37
3641	33
3645	31
3656	32,42
3661	45
3665	36,81
3676	29,30,43
3701	43
3712	38
3741	33
3745	31
3756	32
3761	45
3762	42
3776	30
3812	38
3841	33
3845	29,31
3861	45
3862	29,30,43
3876	30
3882	38
3904	35
3905	35
3912	38
3931	30
3960DP	44
3961	45
3962	29,30
3964	29,30,43
3966DP	27,44
3971	41
3976	30
4063EC	16
4123EC	
	16
4153EC	16
4163EC	16
5001	57

Part #	Page #
5018SPR	49
5021	79
5027	76
5028	77
5029	78
5041	58
5071	50,52
5072	58
5074	58
5075	55
	3,51,52,
5077	80,81
5077SPB	51
5078SPB	51
5078	54
5088S	48
5118SPR	49
5127	76
5128	77
5129	78
5175	55
5178	54
5203-FX	56
5213SPR	49
5217	54
5218SPR	49
5241	22
5258SPR	48
5272	58
5274	58
5413	56
5428S	47
5552	54
5574	57,82,83,85
5583	57
5584	57,82,85
5623	56
5628SPR	49
5658S	48
5711S	47
5813SPR	49
5814SPR	49
5823SPB	51
5823	56
5848S	48
5873	57
5874	50,57
	3,46,47,
5881S	80,83

Part #	Page #
5884S	47
5911	80,83,85
5924	53,83
5924L-EXT	53
5974	57
6030	86
6037STC	82
6040	86
6042STC	81
6046STC	81
6047STC	81
6048STC	80
6049STC	80
6050NIT	85
6051NIT	85
6090EMI	85
6136STC	82
6142STC	82
6148STC	81
6236STC	82
6384	87
7001	61
7011	25
7023	10,83
7041	64
7053	9,14,15,84
7063	4,6
7075	62
7078	62
7093	12,13
7111	25,85
7112	25
7115	24
7123	10
7153	9,14,15,82
7163	4,5,6
7175	19
7177S	48,66
7178	19,62
7183	23
7253	9,14,15
7254MA	22
7263	4,6
7175	62
7277S	49,66
7283	23
7323	10
7351	24,85
7352	25,85

Part #	Page #
7378	62
7383	59,64,83
7451	24
7452	25
7463	5,7
7483	64
7531	66
7552	19,62
7553	5,11,82,83
7563	7,41,85
7574	61
7583	18,61
7593	12,13
7623	60
7631	66
7663	7
7731	66
7752	24
7763	2,3,5,8,80,83
7774	20
7793	12,13
7823	18,60
7831	66
7835	21
7836	19,26
	25
7852	
7863	8
7891	26
7923	18
7933	18,64
7936	19,26
7963	8
7974	61
7991	26
10059	69
13212	89
13219	89
13225	89
13244	89
13312	89
13319	89
13325	89
14212	89
14219	89
14225	89
14244	89
14319	89
14325	89
22070-CH-BK	79

Part #	Page #
22070-0S	78
24625	89
24650	89
30145	31
30176	30
30756	42
31145	31
31245	31
34278	38
34761	33
35756	32
35761	33
35861N	90
36761	33
50517S	47,80
50518S	47
50519S	47,80
50777	52,53
50778SPR	49
50878SPR	46,49
50888	87
50188S	48
51888	56
52408S	46,47,80
52718SPR	49
52888	56
53038	55
53408SPR	48
53518F	48
54418S	47
55418S	47
56128S	47
59150	55
70481	65
71518	24
71553	11
71918	20
72553	11
72918	20,60,66
73918	20,60,66
74453	23
74918	3,20,60,66
76453	23
77128S	49,66
77319	66
77918	22,83
78918	22
79408N	21
79418	24
7W933	18

MAIN OFFICE & MANUFACTURING

WEBSITE

EMAIL

LegacyLLC.com

Contact@LegacyLLC.com

Orders@LegacyLLC.com

ADDRESS

415 Concord Avenue, Bronx, NY 10455

PHONE

Local: +1 (718) 292-5333 Toll Free: +1 (888) 383-3330

415 Concord Avenue,

ACCURATE METAL WEATHERSTRIP

DOOR FLOOD BARRIER

LEGACY RUBBER

WEBSITE

Accurateweatherstrip.com

Contact@LegacyLLC.com Orders@LegacyLLC.com

ADDRESS

415 Concord Avenue, Bronx, NY 10455

PHONE

Local: +1 (718) 292-9333 Toll Free: +1 (888) 383-3330 **WEBSITE**

WEBSITE

ADDRESS

Bronx, NY 10455

RubberLLC.com

Doorfloodbarrier.com

EMAIL

EMAIL

PHONE

Contact@LegacyLLC.com

Orders@LegacyLLC.com

Local: +1 (718) 292-9333

Toll Free: +1 (888) 383-3330

Contact@LegacyLLC.com Orders@LegacyLLC.com

ADDRESS

415 Concord Avenue, Bronx, NY 10455

PHONE

Local: +1 (718) 292-9333 Toll Free: +1 (888) 383-3330






U.S. Department of **Homeland Security**

Critical Manufacturing Sector Coordinating Council





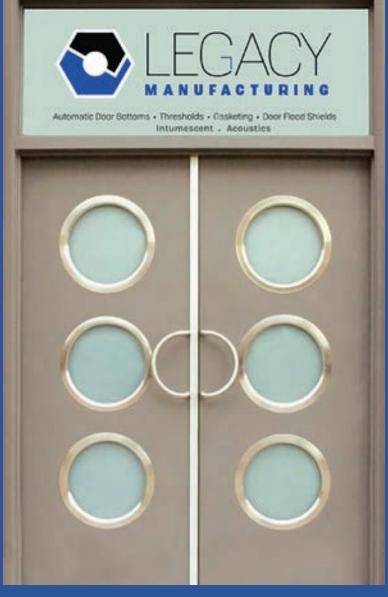











ALL LEGACY PRODUCTS are manufactured in the **UNITED STATES**